



India's Most Reliable GPS Solution



4G



Pictor Telematics Private Limited

Corporate Address


S-512, Upper ground floor, School block, Vikas Marg, Delhi-110092

Operations Address

B-11, 3rd Floor, Sector-04, Noida-201301

Toll Free No-1800 123 2632 | www.pictortelematics.com

Company Overview

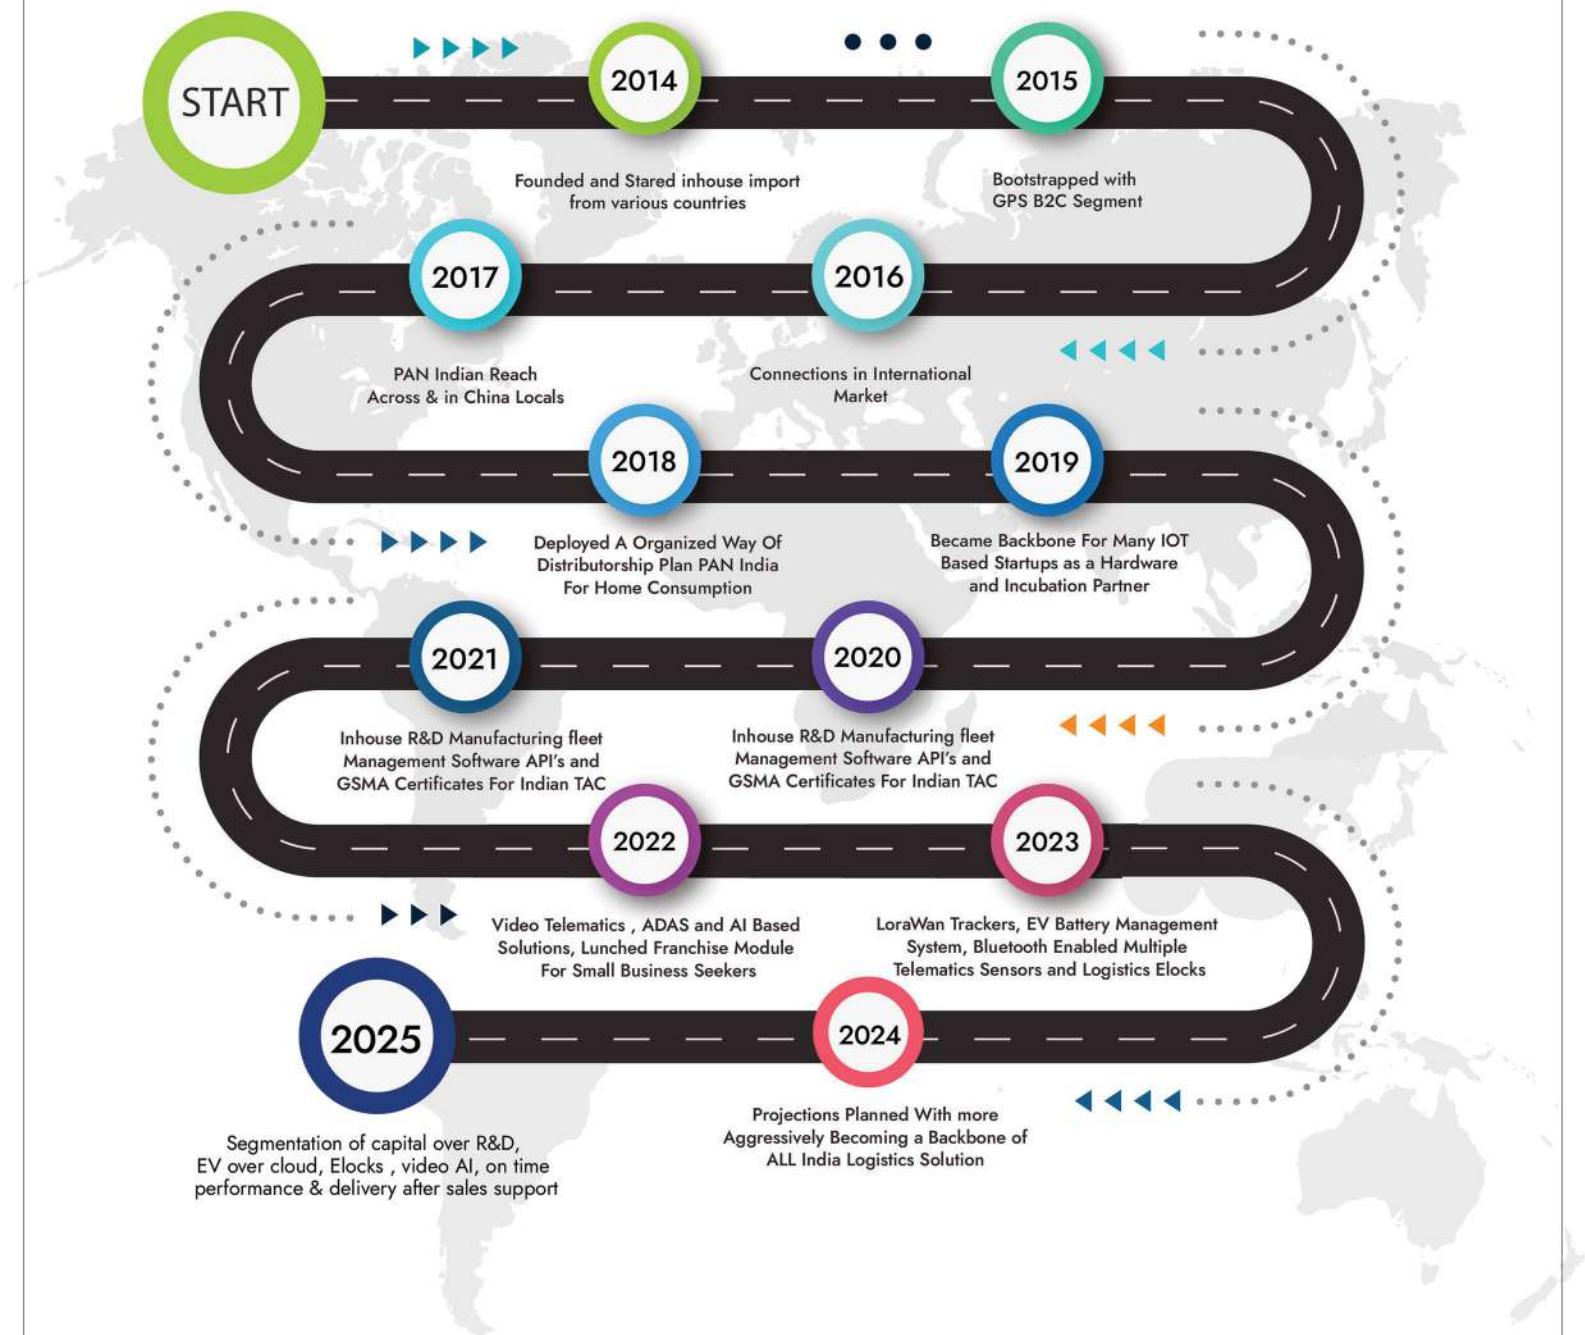






Our Premier Partners



BOSCH
Invented for life



Company Advantages

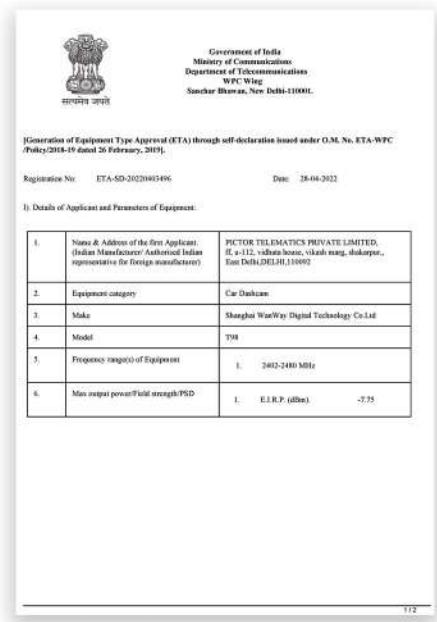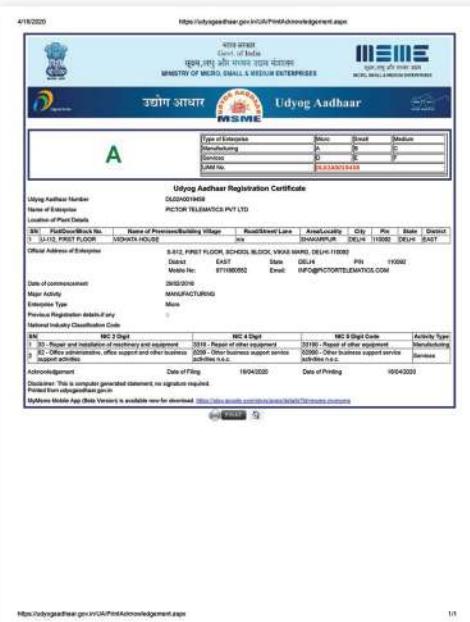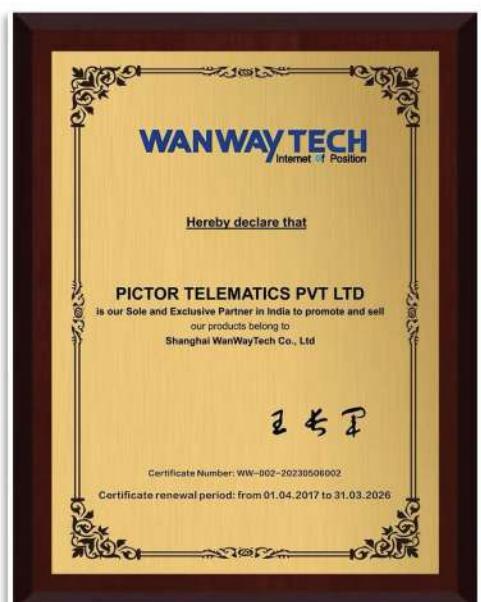

Gallery



GPS TRACKER APPLICATION



GPS TRACKER



PT18



PS03



PS10A



PT200

OBD TRACKER



GS21



GS21A



PS22



PS25

ASSET TRACKER



PT20



PT08 2G



PT08SA 4G



PT30

E- LOCKS



T98 E 4G



PL400/PL1800



PL610S/PL620S



PL610/PL620

DASHCAMS



T98 NON AI



T98 AI



T98 1+2



T98 1+3

FUEL SENSORS



CLS2 ANALOG



CLS2 RS485



CLS2 BLE

PICTOR®

Welcome To The World
of
GPS Tracker





PT06



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.

Voltage Input 9-90v

Device weight 30g

Operating Temperature -20C - 70C

Back-up Battery 55mAh

Dimension(mm) 72(L)*31(W)*12(H)



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.



Over Speed Alram

A safety feature that uses GPS and a database of speed limits to alert drivers when they are speeding.



PT19H



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.

Voltage Input 9-90v

Device weight 32g

Operating Temperature -20C - 70C

Back-up Battery 55mAh

Dimension(mm) 74(L)*35(W)*13(H)



Over-speed Alarm

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.





Real Time Tracking

Update position every 10 seconds with continuous tracking



Geo-fence Alarm

Users can set a range of geo-fence on map with circle, polygon or customize shape, and it will alarm when the device gets in or out of presetting range via APP or SMS

Voltage Input 9V - 90V

Device weight 38g

Operating Temperature -20C - 75C

Back-up Battery 300mAh

Dimension(mm) 82(L)*30.5(W)*14.8(H)



Three Server Enabled

A GPS tracking device that can connect to three servers



Over-Speed Alarm

Sends an alert when the vehicle exceeds the preset speed limit to promote safer driving.

2G

4G

GS900



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Light Sensor

A device that uses a light sensor and GPS to detect when a device is exposed to light or when it is placed in darkness.



Driver Behaviour

Use GPS data and other sensors to track and analyze a driver's actions, helping to improve safety and efficiency



Rapid Acceleration

A device that measures the rate of change in velocity (acceleration) of an object over time

Voltage Input 9-90v

Device weight 28g

Operating Temperature -25C - 75C

Back-up Battery 55mAh

Dimension(mm) 85(L)*24(W)*14(H)

2G / 4G

PT18



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



ACC Anti Theft Alarm

A vehicle security system that utilizes the car's ACC (Accessory Circuit) to detect when the ignition is turned on or off, triggering an alarm or other security measures



Corner Upload Location

specifying a location for uploading files, potentially in the context of a file storage service or a mapping application



External voltage detection

External voltage detection refers to the process of identifying the presence and level of electrical potential in a circuit or device, external to the primary measurement device.

Voltage Input 9-90v

Device weight 35g

Operating Temperature -20C - 60C

Back-up Battery 50mAh

Dimension(mm) 74(L)*31(W)*13(H)



XYZ1



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Mileage Data

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



SOS + MIC

1. Enables to monitor unusual sounds.
2. Alerts you in emergency situations.



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.

Voltage Input 9-90v

Device weight 32g

Operating Temperature -20C - 70C

Back-up Battery 55mAh

Dimension(mm) 75(L)*33(W)*12(H)



G17S



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



AC + Door Detection

1. The device is enabled to alert of the door being opened and closes
2. The device is enabled to alert of the AC being switched On and Off



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Trace Playback

Shows your travel history, including where and how you traveled, on an Android phone or tablet.

Voltage Input	5-32V
Device weight	33g
Operating Temperature	-20C - 70C
Back-up Battery	250mAh
Dimension(mm)	74(L)*32(W)*14(H)



PS03



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Temperature Detection

Device sends an alert when the vehicle temperature deviates from the preset range



Remote Fuel Cut Off

A device that allows real-time tracking of a vehicle location and enables the user to cut off its fuel supply remotely.



Rapid Acceleration

When your speed is over what you set, it will send alarm to remind you keep safe.

Voltage Input	9-90v
Device weight	50g
Operating Temperature	-20C - 70C
Back-up Battery	55mAh



PS07



PT100



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input 9-90v

Device weight 48g

Operating Temperature -20C - 80C

Back-up Battery 55mAh

Dimension(mm) 80(L)*34(W)*15(H)



Dual Server Enabled GPS

A GPS tracking device that can connect to two servers



PT200

Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



RS232

RS232 port can be equipped with a Camera, RFID, magnetic card reader or OBD II reader

Voltage Input 9-90v

Device weight 106g

Operating Temperature -20C - 80C

Back-up Battery 500mAh

Dimension(mm) 99(L)*54(W)*19.5(H)



Dual Server

Support uploading location data to two servers simultaneously





P09N



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



SOS

Trigger an emergency call instantly when in danger.

Voltage Input 5-32V

Device weight 47g

Operating Temperature -20C - 70C

Back-up Battery 250 mAh

Dimension(mm) 76(L)*27(H)*14(H)



AC + Door Detection

- 1.The device is enabled to alert of the door being opened and closes
- 2.The device is enabled to alert of the AC being switched On and Off



Analog Input

Supports external sensors for temperature, or pressure.

2G



Real Time Tracking

Update position every 10 seconds with continuous tracking



Wire Cut Alert

Notifies the user if the GPS wire is cut.



ACC Detection

Alerts the user when the vehicle power is turned ON or OFF.



Remotely Cut-off Petrol

Allows remote fuel and power cut-off for added security in case of anomalies.



PT101B

Voltage Input 9-28V

Device weight 398g

Operating Temperature -20C - +70C

Back-up Battery 300mAh

Dimension(mm) 82(L)*30.5(W)*14.8(H)

2G



Real Time Tracking

Update position every 10 seconds with continuous tracking



Mileage Report

A safety feature that uses GPS and a database of speed limits to warn drivers when they are speeding



SOS+MIC

1. Make emergency call when in danger
2. Device enabled to communicate the sounds in the vehicle

Voltage Input 9.90v

Device weight 51g


Operating Temperature -20C - 75C

Back-up Battery 250mAh

Dimension(mm) 79.5(L)42(W)12.5(H)



PS10A

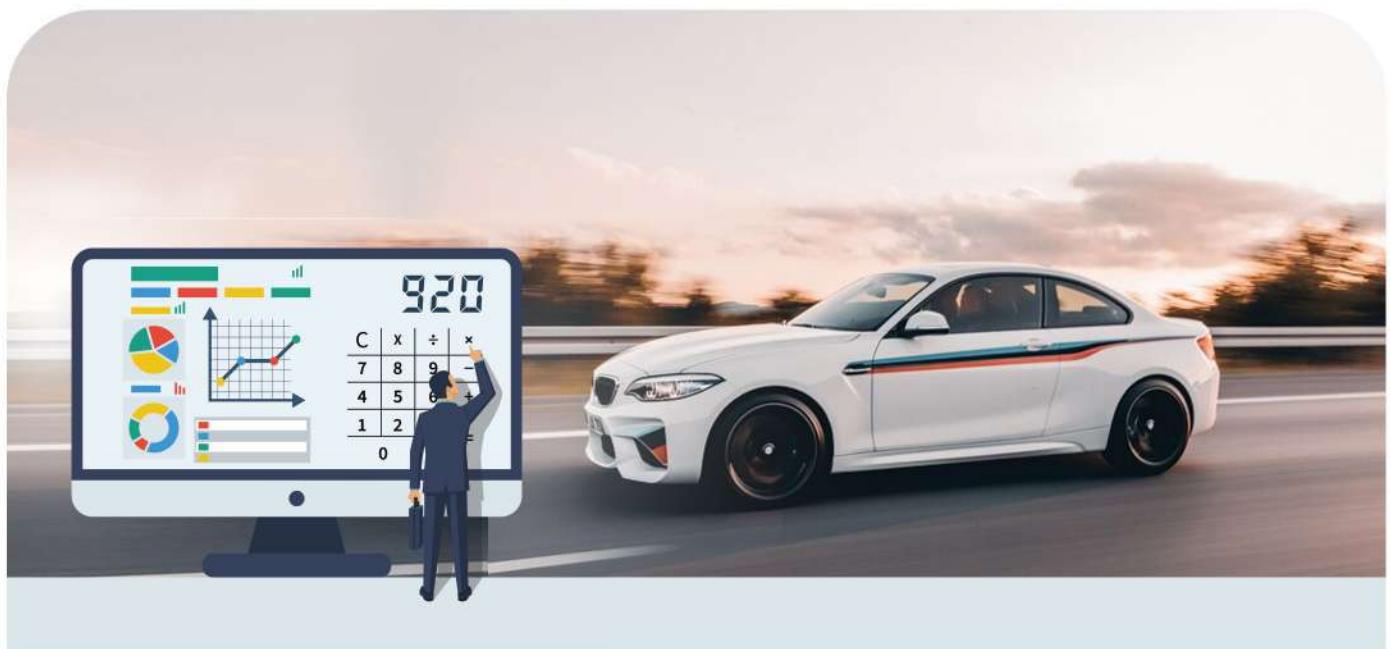

MILEAGE REPORT

It can help you to know how far you drive



Real Time Tracking

The process of continuously monitoring the location, status, or progress of people, assets, or processes in real time



G-Sensor (3-Axis)

Detects sudden movements like acceleration, braking, or impact.



BLE 5.0 Sensor

Advanced Bluetooth Connectivity for Seamless Integration With Additional Sensors



Fuel Sensor Support

Monitors fuel levels and consumption to prevent fuel theft.

Voltage Input	9-95V
Device weight	47g
Operating Temperature	-20C - 75C
Back-up Battery	250 mAh
Dimension(mm)	79.5 (L) *42 (W)*12.5 (H)



PS10B

Fuel Sensor Support
Monitors fuel levels and consumption to prevent fuel theft.

Analog Input
Supports external sensors for fuel, temperature, or pressure monitoring.

BLE 5.0 Sensor Support
Advanced Bluetooth connectivity for seamless integration with additional sensors



Real Time Tracking

Update position every 10 seconds with continuous tracking



BLE 5.0 Sensor Support

Advanced Bluetooth connectivity for seamless integration with additional sensors.



RS485 Port

Advanced ports for gathering and analyzing fuel data.



Fuel Sensor Support

Monitors fuel levels and consumption to prevent fuel theft.

Voltage Input 9-90V

Device weight 47g

Operating Temperature -20C - 75C

Back-up Battery 250mAh

Dimension(mm) 79.5(L)42(W)12.5(H)



PS10C



RS485 Port

Advanced ports for gathering and analyzing fuel data.

Analog Input Digital

Supports external sensors for fuel, temperature, or pressure monitoring.

BLE 5.0 Sensor Support

Advanced Bluetooth connectivity for seamless integration with additional sensors.

PICTOR®

Welcome To The World
of
Asset Tracker





PT30



Real Time Tracking

Update position every 10 seconds with continuous tracking



3000mAh Battery

3000mAh large battery for long standby time.



Driver Behaviour

If the vehicle's driving speed exceeds the set speed, an overspeed alarm is uploaded.



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input

4.12v

Device weight

92.5g

Operating Temperature

-20C - +70C


Back-up Battery

3000mAh

Dimension(mm) 75(L)*45(W)*21(H)

2G

Every Move, Always Tracked.

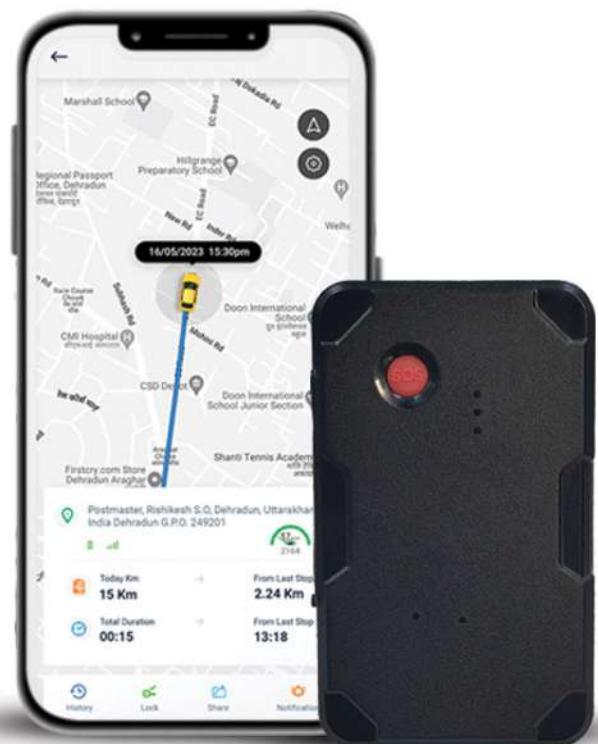



PT20



Real Time Tracking

Update position every 10 seconds with continuous tracking



6000mAh Battery

6000mAh large battery for long standby time.



Light Sensor

Device sends notification when someone removes the device from its place



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input

3.7V.

Device weight

175g

Operating Temperature

-25C - 80C

Back-up Battery

6000mAh

Dimension(mm) 80(L)*50(W)*32(H)

2G **4G**



PT08SA



Real Time Tracking

Update position every 10 seconds with continuous tracking



10000mAh Battery

10000mAh large battery for long standby time.



Driver Behaviour

Device sends notification when someone removes the device from its place



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input

3.7V.

Device weight

218.5g

Operating Temperature

-20C - +60C

Back-up Battery

10000mAh

Dimension(mm)

85(L)*61(W)*31(H)

2G **4G**

PT -ID 02



Product Specifications

Real Time Tracking

Battery - Rechargeable 1500mAh

Network - 2G

GSM - 850/900/1800/1900MHz

Motion and Vibration Detection

Working Temperature: -20°C - 45°C

Tracking System - APP + Web + SMS

Features



Real Time Tracking



Safety Alerts



SOS Button



Set Safe Zone



Two Way Voice Calling



Monitoring



GPS ID 002



4G

Product Specifications

Real Time Tracking

Battery - Rechargeable 2200mAh

Network - 4G+2G

GSM - 850/900/1800/1900MHz

No Distance Limitation

Working Voltage : 3.7V

Tracking System - APP + Web + SMS



WITH Walkie Talkie Feature



YG119 Hunting Dog GPS Tracker



Product Specifications

Real time tracking via tracking APP


Geo-fence/Low battery alarm

Find your pet via buzzer sound

Electric shock training for dogs

Electric shock current - Instantaneous voltage 6800V

Charging voltage : 5VDC

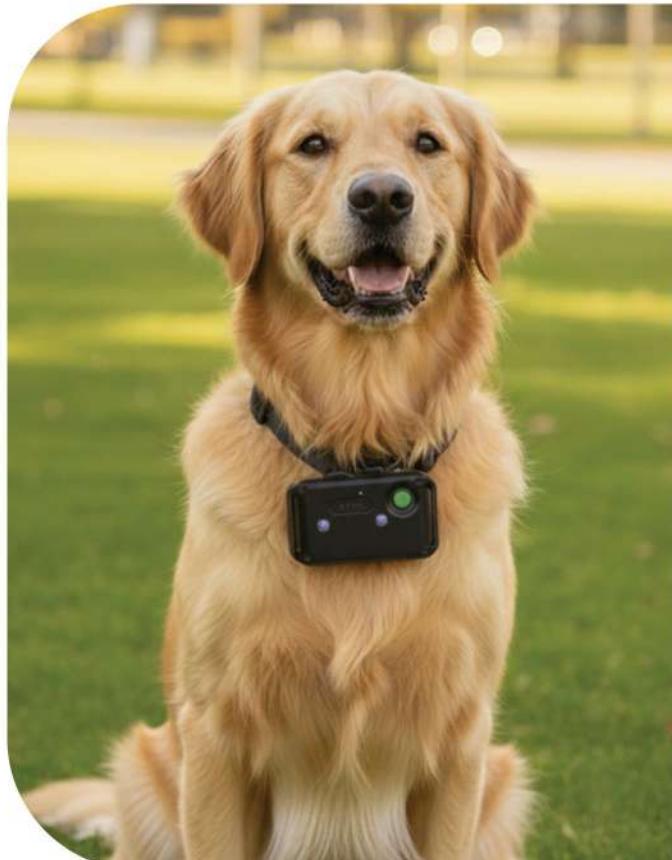

IP68 WATERPROOF



PICTOR®

Welcome To The World
of
OBD Tracker





PS25



Real Time Tracking

Update position every 10 seconds with continuous tracking



Smart Plug and Play

Easy to install with 16 pins to connect vehicle obd port.



Mileage Report

It can help you to know how far you drove.



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input

3.7V.

Device weight

175g

Operating Temperature

-25C - 80C

Back-up Battery

55mAh

Dimension

80(L)*50(W)*32(H)



PS21



Real Time Tracking

Update position every 10 seconds with continuous tracking



Car Diagnosis

The smart system of the vehicle constantly monitors various functions of the vehicle.



Over-speed Alarm

Device send an alert when the devices cross a preset speed



Trace Playback

Device provide trace history of your vehicle/asset

Voltage Input

9.35v

Device weight

41g

Operating Temperature

-20C - 70C

Back-up Battery

60mAh

Dimension

47(L)*20(W)*43(H)





PS21A



Real Time Tracking
Update position every 10 seconds with continuous tracking



Fast Positioning
Provide a timely positioning service after installing it.



Smart Plug and Play
Easy to install with 16 pins to connect vehicle obd port.



Mileage Report
It can help you to know how far you drove.

Voltage Input	3.7V.
Device weight	175g
Operating Temperature	-25C - 80C
Back-up Battery	60mAh
Dimension(mm)	80(L)*50(W)*32(H)





PS22



Real Time Tracking
Update position every 10 seconds with continuous tracking



Car Diagnosis
The smart system of the vehicle constantly monitors various functions of the vehicle.



Over-speed Alarm
Device send an alert when the devices cross a preset speed



Trace Playback
Device provide trace history of your vehicle/asset

Voltage Input	9.35v
Device weight	41g
Operating Temperature	-20C - 70C
Back-up Battery	60mAh
Dimension(mm)	47(L)*20(W)*43(H)





T8608

 **Real Time Tracking**
Update position every 10 seconds with continuous tracking

 **BLE Accessories**
All Bluetooth accessories are supported with the device.

 **Over-speed Alarm**
Aggressive driving behavior detection, e.g. harsh braking and acceleration

 **Crash Detection**
Accident data collection for reconstruction and analysis

Voltage Input	7-32v
Device weight	50g
Operating Temperature	-30C - +80C
Back-up Battery	110 mah
Dimension(mm)	57(L)*50(W)*24(H)

2G



TLD2 D

 **Real Time Tracking**
Update position every 10 seconds with continuous tracking

 **BLE Accessories**
All Bluetooth accessories are supported with the device.

 **Over-speed Alarm**
Device send an alert when the devices cross a preset speed

 **Trace Playback**
Device provide trace history of your vehicle/asset

Voltage Input	7-32v
Device weight	48g
Operating Temperature	-30C - +80C
Back-up Battery	200mAh
Dimension	60(L)*46(W)*22(H)

2G

PICTOR®

Welcome To The World
of
Dashcam Tracker



T98 NON AI Dual Camera

Product Features

Video: 2CH

Real Time Tracking

Resolution: build-in 1CH 1080P forward camera + 1CH 720P

Two Way Voice Calling

Storage: 1xTF card Max (512GB)

Working Voltage: DC 9-36V

Operation Temperature: -30°C ~ 80°C



T98 1+2 DASHCAM GPS TRACKER

Product Features

Video: 3CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 2CH 720

3 AXIS G- Sensor

ADAS & DMS

Storage: 1xTF card Max (512GB)

Working Voltage: 10 -36V

Operation Temperature: -20°C - +60°C



T98 1+3 DASHCAM GPS TRACKER

Product Features

Video: 4CH

Real Time Tracking

Resolution: build-in 1CH 1080P + 3CH 720

Support ADAS and DMS AI Safety

Storage: 2xTF card Max (512GB)

Working Voltage: 10V - 36V

Operation Temperature: -20°C - +60°C



Additional

T98 NON AI OEM Dashcam GPS TRACKER

Product Features

Video: 2 CH

Real Time Tracking

3 axis gravity sensor, support collision
miniature


The ACC detection is supported

WIFI : Built-in 2.4GHz hotspot WiFi

Storage : Maximum support is 256GB

Working Voltage : DC 8V-36V

Working Temperature -20 to 70~C

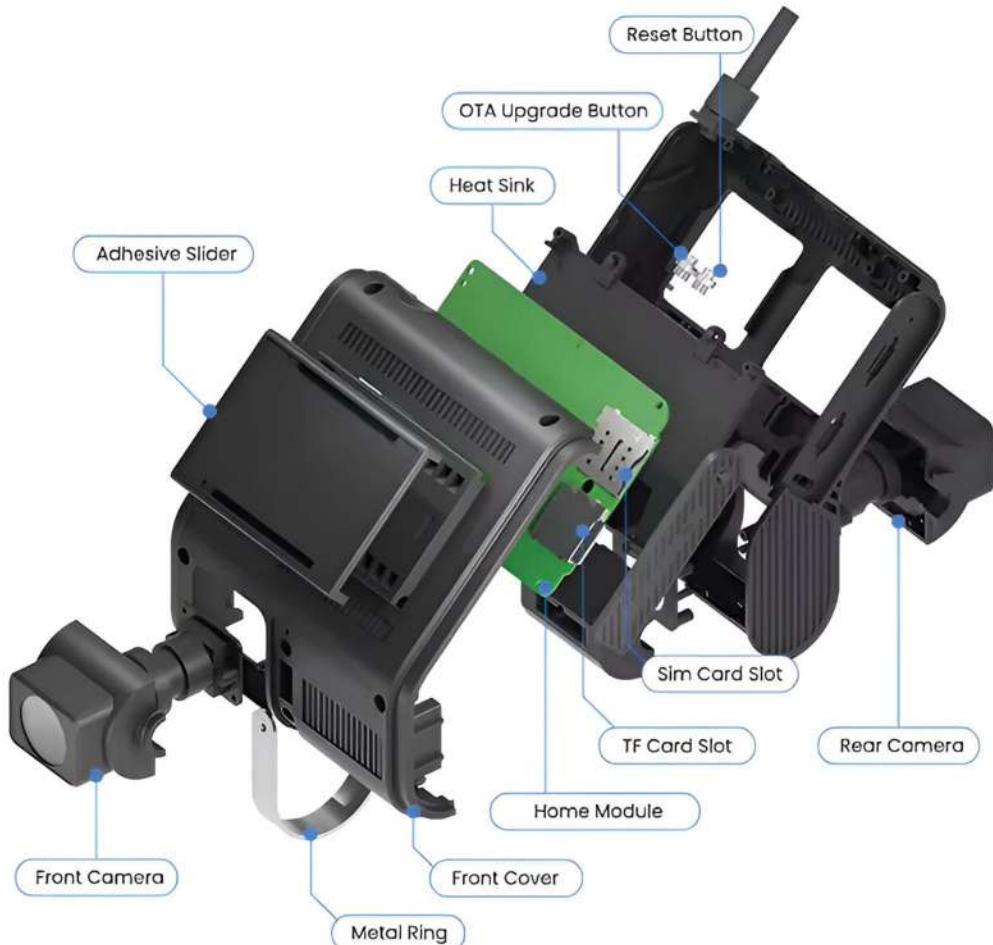

EH11 DASHCAM GPS TRACKER

Product Features

1080P (ADAS Camera, optional)
720P /960H/D1/CIF



Real Time Tracking

Collision Alarm. Photo Positioning,
Acc Detection

History Video Playback

Storage : TF Card Max (128g)



Working Voltage : 9V-90V

Working Temperature -20 - 70~C

Vibration Alarm

With built-in vibration sensor, an alarm will be sent immediately when the vehicle has abnormal vibration.



4G Dashcam GPS Tracker

- ACC Detection
- Remote Recording
- Remote OTA
- Vibration Alarm
- Collision Alarm
- SOS Alarm
- Remote Intercom
- Live Video Monitoring
- History Video Playback



H20P Dashcam GPS TRACKER



Product Features

Video: 2CH With Inbuilt WIFI

Real Time Tracking

Support dual-channel 1080P recording (ADAS DMS)

Support real-time video, playback, emergency alerts, and TTS text messages

Storage : Single slot (supports up to 512GB)

PowerInput : 9V~36V DC

Working Temperature -20 to 70~C



ADAS



DMS



T98 2+2 DASHACM GPS TRACKER

Product Features

2-Ch 1080P Inbuilt | 2-Ch 720P Additional



Real Time Tracking WITH ADAS DMS

Support real-time video, historical video playback



Sudden acceleration, harsh braking, sharp turns, and collisions.

Storage : 1*Micro SD Card(512G)

Voice support intercom/monitoring



Support DMS function



4G AI CAM GPS

All in one

Product Features

Video: Out Door Camera

Real Time Tracking

Resolution: build-in 720* 1080

Human Detection

Storage: 1xTF card Max (512GB)


Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C



4G

Human Detection

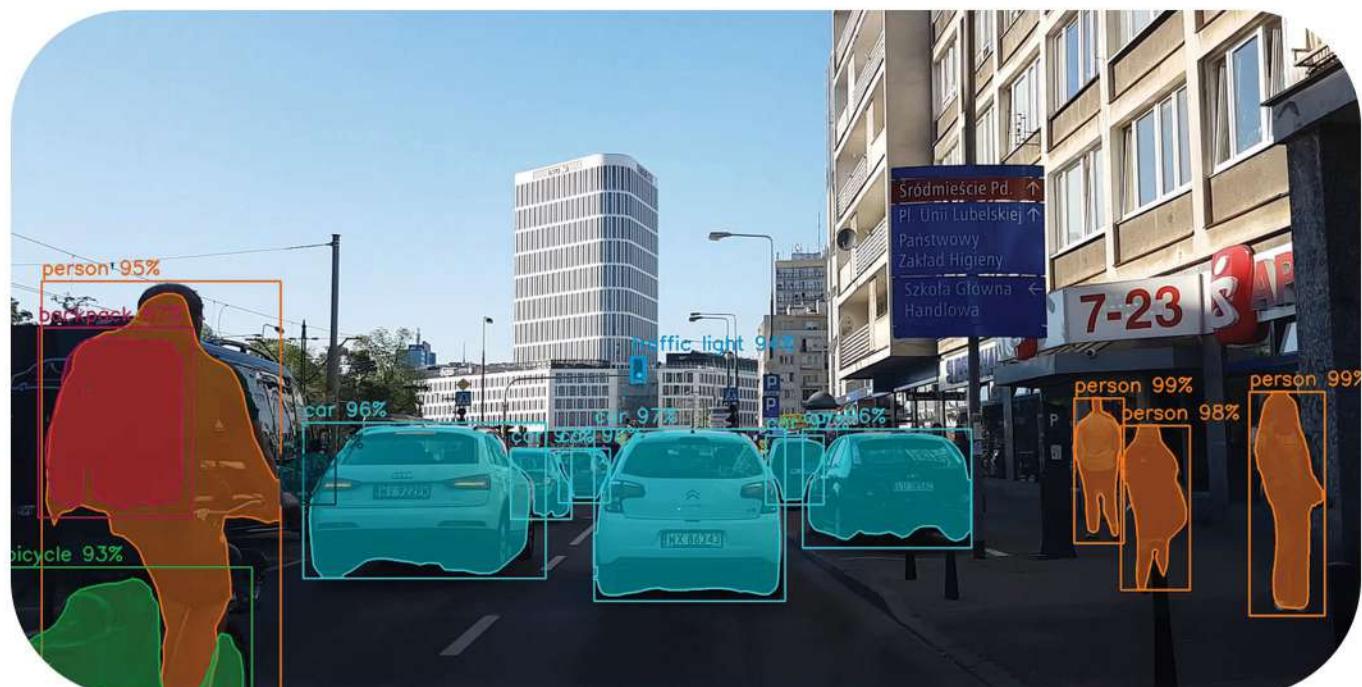

K3 DASHCAM GPS TRACKER

Product Features

Dual recording: 2K (front) + 1080p (rear)



Real Time Tracking

Support Two ways Communication

The ACC detection is supported

3 Inch Lcd Screen




Storage : Maximum support is 512G Card

Working Voltage : 12-24V

Working Temperature -20 - 70~C

DUAL CAMERA

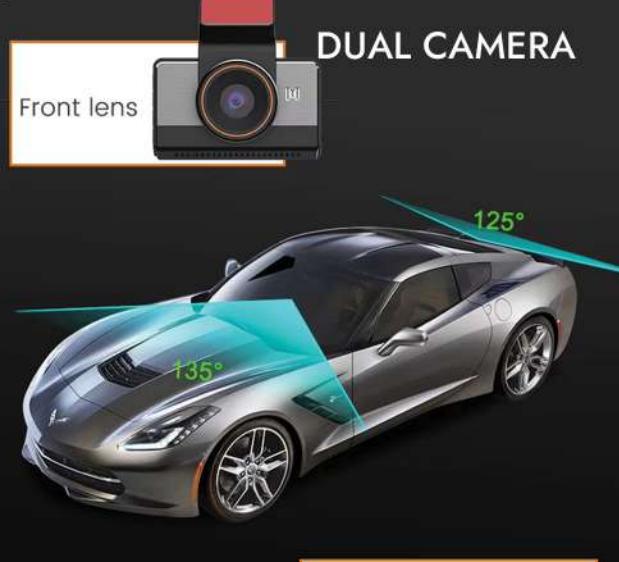

Front lens

125°

135°

Rear lens

APP remote monitoring

Remote playback
When you live stream remotely, if you want to watch previous videos, you can also replay them remotely



GPS Track History
Car driving path will be recorded and real-time playback on car assist APP



One click capture
Share your trip logger or interesting videos with friends. Read pictures and videos from other friends



EH15 DASHCAM GPS TRACKER

Product Features

2 Channel 1080P 4 Channel 720p



Real Time Tracking With ADAS & DMS

Remote Real-time Positioning and
Trajectory Playback



Two-way Communication /Collision Lock
/Wake

Storage : TF Card Max (128g)

Working Voltage : DC 9-36V

Working Temperature -25~C - +60~C



6-Channel Video & 5-Channel Audio

Monitor your fleet with up to 2 Channel 1080P and 4 Channel 720P HD Video and 5-channel Audio for enhanced fleet security, reduce operation costs, and improve the driver's safety.

Collision Lock/Wake & Loop Recording

Protect critical footage during accidents with collision-triggered locking and continuous loop recording.



ED08R MDVR GPS TRACKER

Product Features

8-Channel 1080P Video Recording



Real Time Tracking WITH ADAS DMS & BDS

Blind Spot Detection / Advanced Driver Assistance Systems

History Video Playback



Storage : 1*Micro SD Card(512G) + 1*Hard Disk(2TB)

Working Voltage : DC9-30V

Working Temperature -30 - 70~C



**8CH to show
8 split videos on the screen**

Mechanical Hard Drive and SD card

Supports 2.5-inch 2TB hard disks for easy expansion

2TB



Taxi Meter - GF06R GPS TRACKER

Product Features

Two way communication

Real Time Tracking

Integrated build-in digital audio recording technology to support long-time audio record.

Built-in LCD display for dispatching or sending SMS even make a calling.

Build-in printer to print tachograph data.

Working Voltage : 9-36VDC

Working Current : 80mA@12V



PICTOR®

Welcome To The World
of
Elocks



CONTAINER E-LOCK With GPS TRACKER

Product Features

Real Time Tracking

Multiple Unlock Method

Dual Sim Connectivity

2G/4G GSM & GPRS Support

Low Power Consumption

Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C



[PL610](#)

[PL620](#)

2G

4G



Unlock Method

Unlock by RFID CARD

Unlock by Bluetooth

Unlock by Application

CONTAINER E-LOCK With GPS TRACKER

Product Features



Solar Panel

Real Time Tracking

Multiple Unlock Method

Dual Sim Connectivity

2G/4G GSM & GPRS Support

Solar Panel

Working Voltage: 9V - 36V

Operation Temperature: -25°C - +70°C



[PL610S](#)



[PL620S](#)



Unlock Method

Unlock by RFID Card

Unlock by Bluetooth

Unlock by Application

T98 E-LOCK WITH GPS TRACKER

Product Features

Real Time Tracking

Multiple Unlock Method

Display Oled Screen

4G GSM And GPRS

Remote Setting

Working Voltage: 36V - 42V

Operation Temperature: -20°C - 70°C




Unlock Method

- Unlock by RFID Card
- Unlock by Password
- Unlock by Bluetooth
- Unlock by Application

PICTOR®

Welcome To The World
of
EV Vehicle Tracker

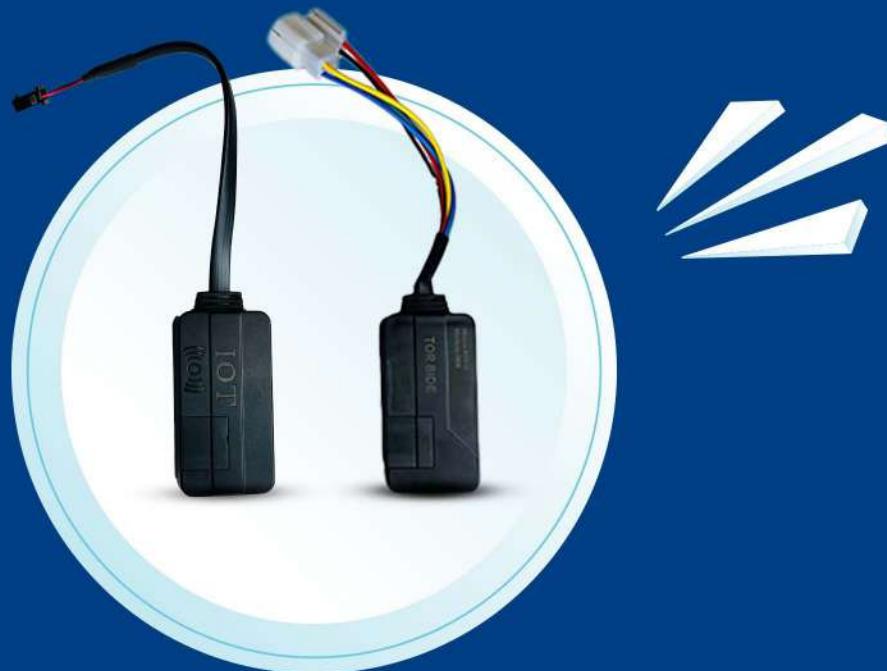



Real Time EV Tracking
Update position every 10 seconds with continuous tracking

Theft control
A GPS tracking device used to monitor the location of valuable assets like vehicles


Battery health
A measure of how much charge is available in a battery

BLE supported
Supported With Ble

Input Power	9-90V
Device weight	50g
Operating Temperature	-25 - 70C
Battery Power	60mAh
Dimension(mm)	78(L)*65(W)*31(H)

2G

Benefits of BMS in Electric Vehicles

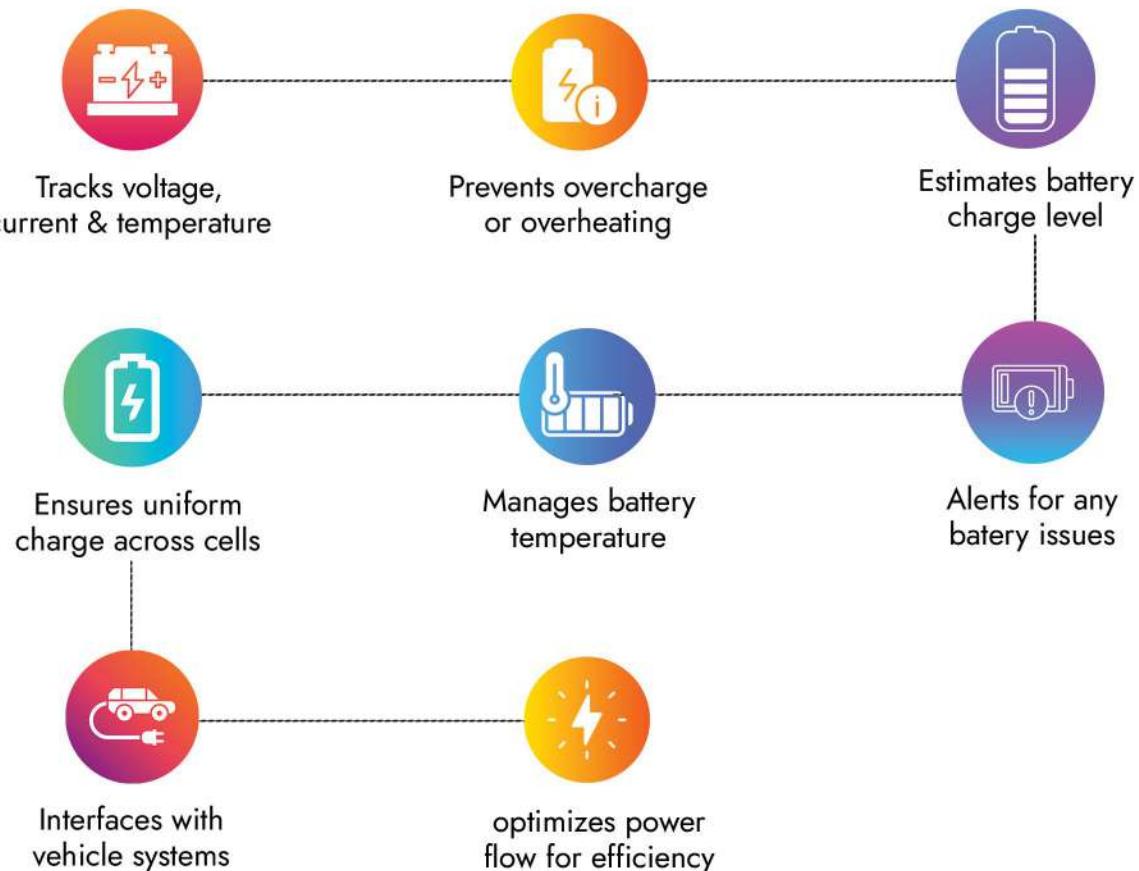



PS26



Real Time Tracking

Update position every 10 seconds with continuous tracking



Wheel Lock IOT

A security device that combines a traditional wheel lock with GPS tracking technology



Ignition Detection

a GPS tracking device that allows it to monitor and report when a vehicle's ignition is turned on or off



RTOS Based Device

IoT devices. RTOSs are used to ensure that tasks are completed within strict time constraints.

Input Power 9.90V

Device weight 66g

Operating Temperature -20c - 70C

Internal Battery 100mAh

Dimension(mm) 74(L)*36(W)*15(H)

2G

Wheel Lock IOT



PICTOR®

Welcome To The World
of
Fuel level sensors



CLS2 BLUETOOTH FUEL SENSOR With GPS TRACKER



Product Features

Ingress protection rating (IP67)

Bluetooth version (5.0 BLE)


Operation temperature (-40 - + 85C)

Calibration via Bluetooth


Transmission power (6dBm)

Built in Accelerometer

Ability Of Operation in the Mode
Master Slave

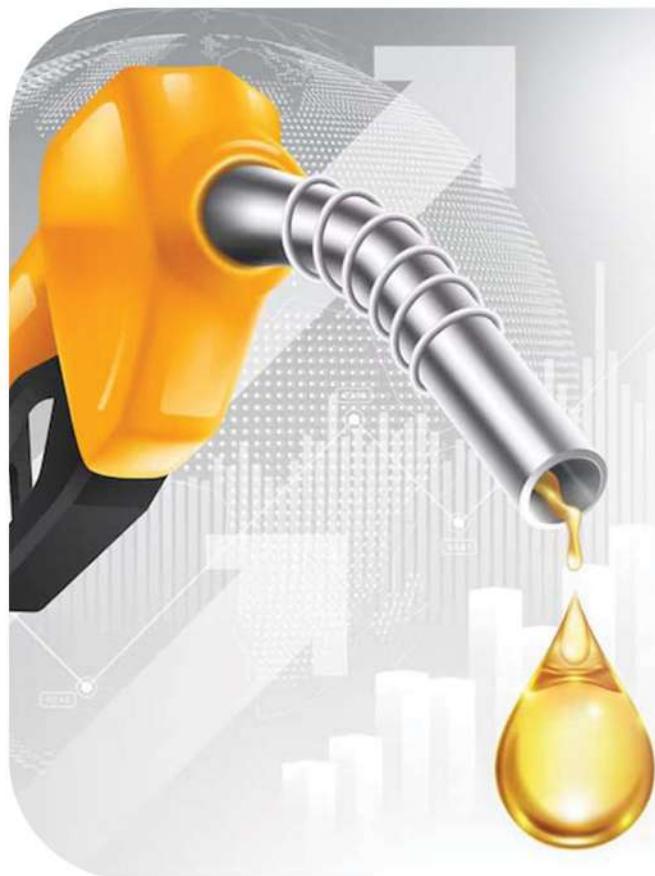

Understanding Fuel Sensor Specifications and Features

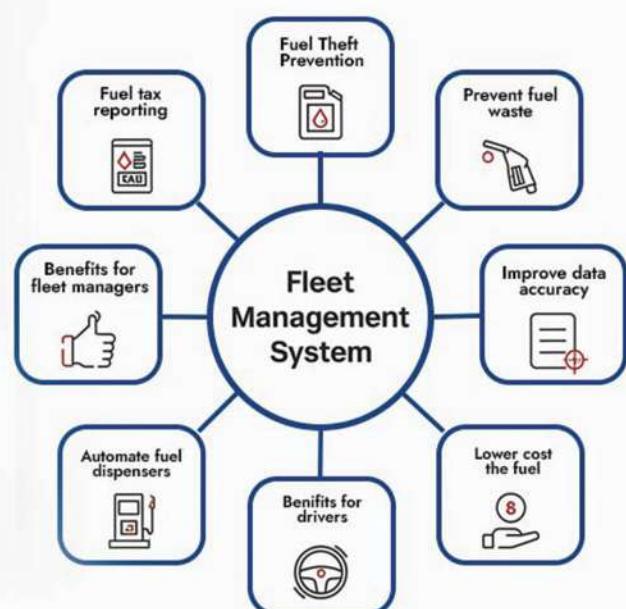

CLS2 ANALOG FUEL SENSOR With GPS TRACKER

Product Features

Analog output signals

Ingress protection rating (IP65)

Operational temperature (-40 ~ +85)

Power supply: (DC10V ~ 32V)

Customizable Input Voltage

High Accuracy

Easy Setup



CLS2 RS485 FUEL SENSOR With GPS TRACKER



Product Features

Length up to 700mm

Frequency (500-1500 Hz.)

Interface (RS485)

Calibration via web tool

Operational temperature (-40 to +65)

Ingress protection rating (IP67)

OUR SOFTWARE SOLUTIONS

White Label GPS Tracking Software

- Vehicle Tracking Software
- Accurate Fuel Tracking Software
- Dashcam Tracking Software
- E-locks Tracking Software

