

# PL610 Protocol Manual

## V2.6

Revision Date: 2022-08-14



# Table of Contents

<b>T98E Protocol Manual .....</b>	<b>1</b>
Table of Contents .....	2
1 Preface .....	4
2 Terms and Abbreviations .....	4
3 Product Working logic.....	4
3.1 Sleep state.....	4
3.2 Awakening state.....	4
3.3 Wake up source.....	5
3.4 Blind zone data.....	5
4 Protocol Basis.....	6
4.1 Communication mode.....	6
4.2 Transmission Rules.....	6
5 Command Syntax(GRPS/SMS) .....	6
5.1 Read/Write Command Syntax.....	6
5.2 Command Reponse Syntax.....	7
6 Protocol Integration Guide.....	8
6.1 Message Interaction diagram.....	8
7 Device Send data to GPS Platform .....	9
7.1 Position and Alert Data .....	9
7.2 P45 - Lock and Unlock Report .....	12
7.3 Command Response .....	15
8 Device Send short message to Authorized Phone numbers .....	15
8.1 Position data short message Format .....	15
8.2 Alert data short message Format .....	16
8.3 Command Response short message Format .....	17
9 GPS Platform Send Commands to Device.....	18
Command Word List(ASCII) .....	18
P00 - Set working mode .....	20
P01 - Query firmware version .....	21
P02 - Query Current Position .....	22
P04 - Set/Query Position Data Reporting Time interval and Timing wake up interval.....	23
P06 - Set/Query SIM1 and SIM2 Communication Parameters .....	24
P06 - Set/Query SIM1's IP Port and GPRS/Cellular network Parameters.....	24
P06 - Set/Query SIM2's IP Port and GPRS/Cellular network Parameters.....	26
P09 - Turn On/Off GPS and GSM indicator .....	28
P10 - Set/Query the time difference of GPRS position data and SMS alert .....	29
P11 - Set/Query Authorized Phone Numbers.....	31
P12 - Enable or Disable the device to send SMS alerts to the specified Authorized Phone number .....	32
P13 - Restore Factory setting .....	34
P14 - Read device's IMEI number.....	35
P15 - Reboot the device remotely.....	36

P22 - Time Synchronization.....	37
P24 - Set/Query Geo-fence name and enable/disable one of fence ID.....	38
P29 - Set/Query the Fence Nodes of The Polygon Geo-fence.....	40
P30 - Delete Fence Node info and Geo-fence name for a Fence ID.....	44
P31 - Finished Fence Node information Setting.....	45
P32 - Force the device to go to sleep.....	46
P35 - Acknowledge Command to receive Alert and Position data.....	47
P36 - Set/Query Vibration Sensitivity Coefficient threshold of Vibration alert and repeated interval.....	48
P37 - Set/Query Vibration Sensitivity Coefficient of Motion state detection.....	50
P38 - Set/Query Interval of Unlocking alert.....	51
P39 - Set/Query Working time after waking up.....	52
P40 - Set/Query Alert Switch.....	53
P41 - Authorized RFID key Management.....	56
P41 - Query Authorized RFID key.....	56
P41 - Register(Add) Authorized RFID Key.....	57
P41 - Delete Specified Authorized RFID key.....	59
P41 - Delete All Authorized RFID keys in Device.....	60
P42 - Batch-Add Unlocking Authorized RFID.....	61
P43 - Unlock the device by Password.....	61
P44 - Change the Unlock Password.....	63
P46 - Acknowledge Command to receive Lock or Unlock Report.....	64
P50 - Enable/Disable the Power Switch on Device Mainboard.....	65
P58 - Set/Query RFID unlocking related to geo-fence.....	66
P97 - Set/Query Data Acknowledgement Mechanism.....	67
P99 - Firmware Upgrade over the air.....	69
P100 - Query device real-time status and GSM module version.....	70
P106 - Set/Query Can Unlock In The polygon Geo-fence.....	72
P108 - Set/Query Can Unlock In The POI(Point of Interest).....	74
P110 - Set/Query G-Sensor filter function.....	76
P111 - Set/Query Working In Lock/Unlock Mode Reporting Data Time Interval.....	78
P112 - Enable/Disable Lock Rope Cut Reminder(Blink & Beep).....	79
P113 - Enable/Disable Blind Area Data Packaging.....	80
P114 - Enable/Disable Base Station Positioning Function.....	81
P122 - Enable/Disable Bluetooth Function.....	82
P123 - Change the Bluetooth Encryption Key.....	82
P125 - Extract Data From Micro USB/Bluetooth (need firmare version 'T98EE_.....').....	83
P126 - Clear blind spot data.....	87
P127 - Extended power saving solution: turn off GPS module in idle time.....	88
P128 - Query Bluetooth Mac Address & Name & Version.....	89

# 1 Preface

This document is intended primarily for software engineers and system administrators. Readers must have a basic knowledge of the computer. Due to continuous optimization and improvement of product features, it is possible that the protocol documents you read are not the same as the product currently used. Please contact **Pictor Telematics**' sales for the latest **T98E** Protocol documentation.

# 2 Terms and Abbreviations

Name	Description
GPS Platform	Asset Management GPS platform software, hereafter called GPS platform
Device	T98E intelligent electronic lock, acts as client
IMEI	International Mobile Equipment Identity, each 2G/3G/4G module has its unique IMEI
Unit ID	last 10 digit numbers of the IMEI number. IMEI: 860298043396604 Unit ID : 8043396604
GPRS	General Packet Radio Service
APN	Access Point Name
TCP	Transmission Control Protocol
SMS	Short Message service

# 3 Product Working logic.

## 3.1 Sleep state

The device will switch from the awake state to the sleep state. When sleeping, the GPS and 2G/3G modules will be turned off. The device will sleep for 30 minutes by default (this time can be configured) and wake up periodically. During this period, it can be externally Wake up the source.

## 3.2 Awakening state

In order to monitor the wake-up source in real time and communicate with the GPS platform, the device can be awakened by the wake-up source to change from the sleep state to the awake state. At this time, if the vibration, RFID card reading, Back Cover opened and lock rope insertion and unplugging external wake-up source are detected again, the device will update the wake-up work. The time is 10 minutes (this time is configurable), otherwise the device will work for up to 10 minutes (which is configurable) to go to sleep.

### 3.3 Wake up source

The device will wake up from the external interrupt wake-up source and the RTC wake-up source (internal interrupt), and the external interrupt wake-up source, hereinafter referred to as “external wake-up source”:

No.	Wake up source	After wake up	Remark
1	Vibration	When the device detects the vibration amplitude is greater than the preset vibration sensitivity coefficient, it wakes up and continues to work for 10 minutes (this time is configurable). If the valid external wake-up source is not captured during the period, it sleeps; otherwise, it starts timing when the external wake-up source is detected last time. Work 10 minutes to go to sleep.	external wake up source
2	RFID Key Reading	The device is woken up when detecting the RFID card reading, and continues to work for 10 minutes (this time is configurable). If the valid external wake-up source is not captured during the period, it sleeps; otherwise, the time is started when the external wake-up source is detected last time. Work 10 minutes to go to sleep.	external wake up source
3	Back Cover Opened	The device is woken up when detecting Back Cover Opened and continues to work for 10 minutes (this time is configurable). If the valid external wake-up source is not captured during the period, it sleeps; otherwise, the time is started when the external wake-up source is detected last time. Work 10 minutes to go to sleep.	external wake up source
4	Lock rope inserted and unplugging	The device is woken up when detecting the lock rope is inserted or unplugging, and continues to work for 10 minutes (this Time configurable),If the valid external wake-up source is not captured during the period, it sleeps; otherwise, it starts timing when the external wake-up source is detected last time. Work 10 minutes to go to sleep.	external wake up source
5	Sleep and timing wake up	The device starts timing when it enters the sleep time. If no external wake-up source is generated during this period, it wakes up after 30 minutes, uploads a positioning data and delays 30 seconds to enter the sleep. Otherwise, it goes to the external wake-up source to trigger the wake-up work for 10 minutes(this time is configurable).	RTC wake up source
6	SMS	When the device receives any SMS, it wakes up and continues to work for 10 minutes (this time is configurable). If the valid external wake-up source is not captured during the period, it sleeps; otherwise, it starts timing when the external wake-up source is detected last time. Work 10 minutes to go to sleep.	external wake up source

### 3.4 Blind zone data

If The device enters the mobile network blind zone, the device will save the current position data and alert data (at least 28000) to Flash, and these data will be uploaded to GPS platform in the first-in first-out order after the device is connected to the GPRS

network. The device saves lock and unlock report at least 2400, these data will be uploaded in the first-in first-out order after the GPRS network is restored.

## 4 Protocol Basis

### 4.1 Communication mode

This communication protocol adopts TCP, GPS platform acts as server; Device acts as client. Usually use TCP protocol as the main communication way.

### 4.2 Transmission Rules

Protocol adopts Big-endian network byte sequence to transmit word and double word. Position/Alert data ,Lock /Unlock report are transmitting according First in First out (FIFO).

## 5 Command Syntax(GRPS/SMS)

### 5.1 Read/Write Command Syntax

(<Command Word>,<Parameter 1>,...<Parameter N>)

**Note:**

The command uses '(' as the header, ")" as the end of the package. When editing the command, ignore the '<' and '>' symbol.

Example: (P04,1,60,30)

Field Name	length(byte)	Example(ASCII)
Header	1	(
Command Word	3	P04
Comma as separator	1	,
Each parameter takes a comma as a separator <Parameters...>	N	60,30
End	1	)

## 5.2 Command Reponse Syntax

(<Unit ID>,<Command Word>,<Parameter 1>,...<Parameter N>)

**Note:**

The command response uses ‘(’ as the header, ‘)’ as the end of the package. Please ignore the ‘<’ and ‘>’ symbol when decode the command response.


Example: (8043396604,P43,1,0)

Field Name	length(byte)	Example(ASCII)
Header	1	(
<Unit ID> Last 10 digit numbers of IMEI number	10	8043396604
Comma as separator	1	,
Command Word	3	P43
Comma as separator	1	,
<Parameters...> Each parameter takes a comma as a separator	N	1,0
End	1	)

# 6 Protocol Integration Guide

After the device is configured with the correct host IP address and TCP port, the device will send the position data to the GPS platform automatically when it is in the awake state. The GPS platform refers to the following diagram to respond to the relevant binary position data .All position data and alert data need to be parsed in binary data, with 0x24(HEX) as the data header, and then intercept the data according to the data length; All lock and unlock reports and commands interactions need to convert the binary data into ASCII format and then parse the data ,with 0x28(HEX) as the data header, 0x29(HEX) as the end of the packet.

## 6.1 Message Interaction diagram

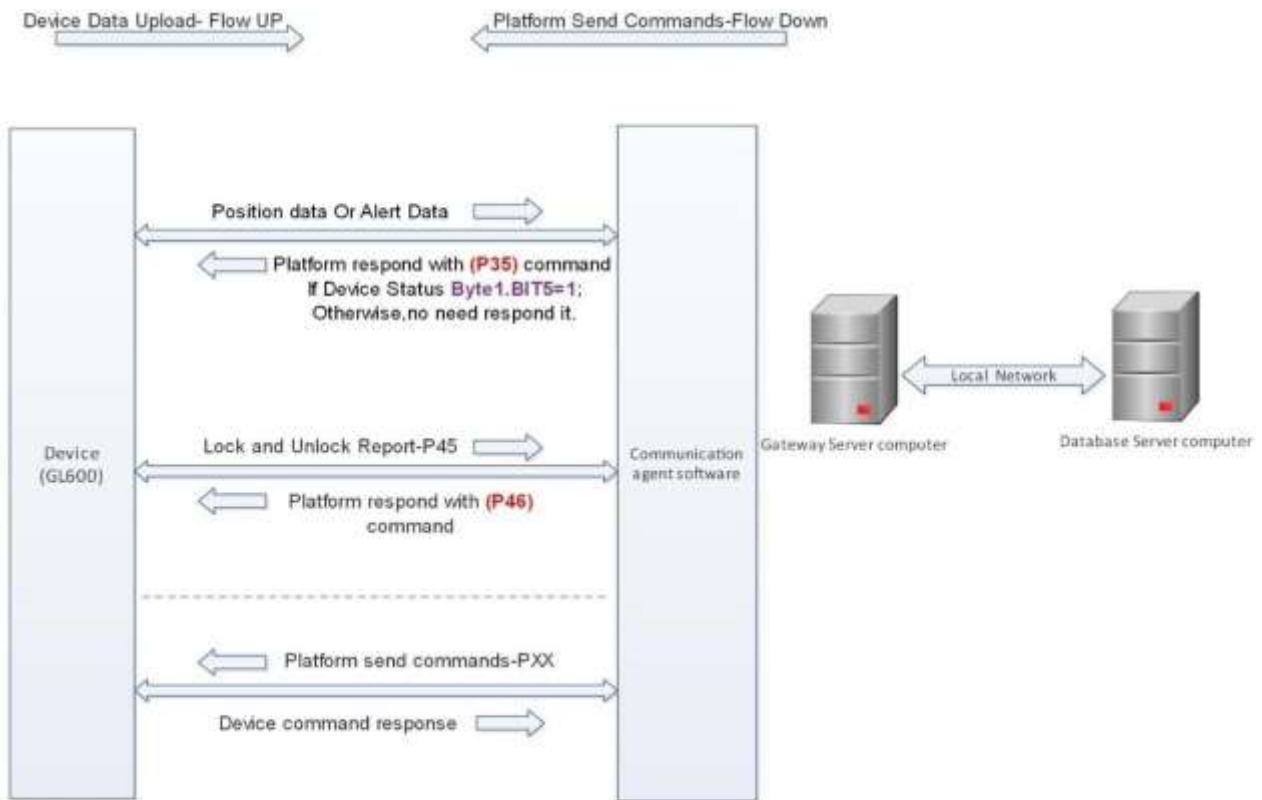

**Note :**  
 Device Status : Byte1.BIT5  
 Refer to section 7.1 Position and Alert Data -No.17

# 7 Device Send data to GPS Platform

## 7.1 Position and Alert Data

Position and Alert Raw data Example (HEX):

2480433966040111002718031919195822424550114158888E15A40000F124080000000000F00F110A24991900000DF0C7

For easy reading, separate the fields with underscores:

24\_8043396604\_01\_1\_1\_0027\_180319\_191958\_22424550\_114158888\_E\_15\_A4\_0000F124\_08\_00000000\_00F0\_OF\_110A249\_9\_19\_00\_00DF0\_C7

No.	Field Name	Data Example(HEX)	Length (Byte)	Description															
1	Protocol header	24	1	0x24 <sub>(HEX)</sub> , Convert to ASCII format ,it's '\$' character															
2	Unit ID	8043396604	5	Last 10 digit numbers of IMEI															
3	Protocol version	01	1	01 indicates protocol version															
4	Device type	1	0.5	1 indicates T98E.															
5	Data type	1	0.5	1 indicates Real time data 2 indicates <b>Alert data</b> 3 indicates Blind zone data															
6	Data length	0027	2	Data content length, total 39 bytes. from <b>No.7</b> to <b>No.27</b>															
7	Date	180319	3	Day Month Year. It's Mar. 18 <sup>th</sup> , 2019															
8	Time	191958	3	Hour-Minute-Second, UTC time, 19:19:58															
9	Latitude	22424550	4	DDMM.MMMM format, the latitude conversion method as below: $22424550/10000=2242.4550$ 2242.4550 DDMM.MMMM $22+42.4550/60=22+ 0.707583=22.707583^{\circ}$															
10	Longitude	114158888	4.5	DDDMM.MMMM format, the longitude conversion method as below: $114158888/10000=11415.8888$ 11415.8888 DDDMM.MMMM $114+15.8888/60=114+ 0.264813=114.264813^{\circ}$															
11	Latitude/Longitude Direction	E	0.5	Convert this' Latitude/Longitude Direction' to Binary system data. 1110 Bit3 to Bit0 from left to right <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Bit indicator</th> <th>Description</th> <th>Example (Binary system)</th> </tr> </thead> <tbody> <tr> <td>Bit3</td> <td>Fixed value 1</td> <td>1</td> </tr> <tr> <td>Bit2</td> <td>Longitude Direction</td> <td>1</td> </tr> <tr> <td></td> <td>1 East Longitude</td> <td></td> </tr> <tr> <td></td> <td>0 West Longitude</td> <td></td> </tr> </tbody> </table>	Bit indicator	Description	Example (Binary system)	Bit3	Fixed value 1	1	Bit2	Longitude Direction	1		1 East Longitude			0 West Longitude	
Bit indicator	Description	Example (Binary system)																	
Bit3	Fixed value 1	1																	
Bit2	Longitude Direction	1																	
	1 East Longitude																		
	0 West Longitude																		

				<table border="1"> <tr> <td>Bit1</td> <td>Latitude direction 1 North Latitude 0 South Latitude</td> <td>1</td> </tr> <tr> <td>Bit0</td> <td>GPS Validity 1 GPS valid 0 GPS invalid</td> <td>0</td> </tr> </table>	Bit1	Latitude direction 1 North Latitude 0 South Latitude	1	Bit0	GPS Validity 1 GPS valid 0 GPS invalid	0																		
Bit1	Latitude direction 1 North Latitude 0 South Latitude	1																										
Bit0	GPS Validity 1 GPS valid 0 GPS invalid	0																										
12	Speed	1A	1	1A(HEX) = 26(Dec), current GPS speed is 26 knots, Convert to kilometer/hour 26 * 1.852 = 48.152 KM/H																								
13	Direction	A4	1	A4(HEX) = 164(Dec), multiply by 2=328(Dec), direction is 328° North is 0°,Clockwise counting The unit in degree. range:0~359 degree																								
14	GPS Odometer	0000F124	4	Unit in kilometer. Current GPS Odometer is 61732 KM. The accumulated mileage of the device when it is awake																								
15	Number of captured satellites	08	1	Captured 8 satellites																								
16	Vehicle ID Blinding Key number	00000000	4	Reserved. This value is fixed to '00000000'.																								
17	Device status	00F0	2	<p><b>Device's status or Alert indicator :</b></p> <p>0x00 0xF0</p> <p><b>Byte2 at left side .it's 0x00; Byte1 at right side it's 0xF0</b></p> <p>Convert 'Device Status' to Binary system data.</p> <p><b>BYTE2    BYTE1</b></p> <p>00000000 11110000</p> <p>Bit7 to Bit0 from left to right</p> <table border="1"> <thead> <tr> <th>Byte. Bit</th> <th>Description</th> <th>Example(Ex) <b>00F0</b>(HEX)</th> </tr> </thead> <tbody> <tr> <td colspan="3"><b>Byte2 Description</b></td> </tr> <tr> <td>Byte2.BIT7</td> <td>Reserved. This bit is fixed at 0</td> <td>0</td> </tr> <tr> <td>Byte2.BIT6</td> <td><b>Motor fault alert</b> 1 indicates triggered alert; 0 indicates normal.</td> <td>0</td> </tr> <tr> <td>Byte2.BIT5</td> <td>Back Cover status: 1 indicates back cover close; 0 indicates back cover opened</td> <td>0</td> </tr> <tr> <td>Byte2.BIT4</td> <td><b>Back cover Opened alert</b> 1 indicates triggered alert ; 0 indicates normal.</td> <td>0</td> </tr> <tr> <td>Byte2.BIT3</td> <td><b>Low battery alert</b> 1 indicates triggered alert; 0 indicates normal.</td> <td>0</td> </tr> <tr> <td>Byte2.BIT2</td> <td><b>Swiping unauthorized RFID key alert</b></td> <td>0</td> </tr> </tbody> </table>	Byte. Bit	Description	Example(Ex) <b>00F0</b> (HEX)	<b>Byte2 Description</b>			Byte2.BIT7	Reserved. This bit is fixed at 0	0	Byte2.BIT6	<b>Motor fault alert</b> 1 indicates triggered alert; 0 indicates normal.	0	Byte2.BIT5	Back Cover status: 1 indicates back cover close; 0 indicates back cover opened	0	Byte2.BIT4	<b>Back cover Opened alert</b> 1 indicates triggered alert ; 0 indicates normal.	0	Byte2.BIT3	<b>Low battery alert</b> 1 indicates triggered alert; 0 indicates normal.	0	Byte2.BIT2	<b>Swiping unauthorized RFID key alert</b>	0
Byte. Bit	Description	Example(Ex) <b>00F0</b> (HEX)																										
<b>Byte2 Description</b>																												
Byte2.BIT7	Reserved. This bit is fixed at 0	0																										
Byte2.BIT6	<b>Motor fault alert</b> 1 indicates triggered alert; 0 indicates normal.	0																										
Byte2.BIT5	Back Cover status: 1 indicates back cover close; 0 indicates back cover opened	0																										
Byte2.BIT4	<b>Back cover Opened alert</b> 1 indicates triggered alert ; 0 indicates normal.	0																										
Byte2.BIT3	<b>Low battery alert</b> 1 indicates triggered alert; 0 indicates normal.	0																										
Byte2.BIT2	<b>Swiping unauthorized RFID key alert</b>	0																										

				1 indicates triggered alert; 0 indicates normal.	
			Byte2.BIT1	<b>Wrong password alert</b> The password is continuously entered incorrectly 5 times. 1 indicates triggered alert; 0 indicates normal.	0
			Byte2.BIT0	<b>Unlocking alert</b> 1 indicates triggered alert; 0 indicates normal.	0
			<b>Byte1 Description</b> <b>Note:</b> Device Locked : Byte1.BIT7 and Byte1.BIT6=1 Device Unlocked: Byte1.BIT6=0		
			Byte1.BIT7	Motor Lock status: 1 indicates Motor lock; 0 indicates Motor unlock.	1
			Byte1.BIT6	Lock Rope status: 1 indicates Lock Rope inserted; 0 indicates Lock Rope unplugging	1
			<b>Byte1.BIT5</b>	ACK indicator 1 indicates This data requires the GPS platform to acknowledge it; 0 indicates This data does not require the GPS platform to acknowledge it. <b>Note:</b> If Byte1.BIT5=1,GPS Platform need to send (P35) command to acknowledge this data. Otherwise, the device will keep sending the same data.	1
			Byte1.BIT4	<b>Vibration alert</b> 1 indicates triggered alert; 0 indicates normal.	1
			Byte1.BIT3	<b>Lock rope tamper alert</b> 1 indicates triggered alert; 0 indicates normal.	0
			Byte1.BIT2	<b>Exit Geo-fence alert</b> 1 indicates triggered alert; 0 indicates normal.	0
			Byte1.BIT1	<b>Enter Geo-fence alert</b> 1 indicates triggered alert; 0 indicates normal.	0

				Byte1.BIT0	Base station positioning indicator 1 indicates Base station positioning; 0 located by GPS positioning	0
18	Battery Level	0F	1	Remaining Battery Level. 0x0F the current battery is 15%, 0x64 means 100% the accuracy is 5%, if the value is 0xFF, means charging		
19	CELL ID and LAC	1116B37E	4	0x1116 <sub>(HEX)</sub> is CELL ID; 0xB37E <sub>(HEX)</sub> is LAC.		
20	GSM signal quality	19	1	Indicates the strength of GSM signal, 19 <sub>(HEX)</sub> , signal value 25 <sub>(DEC)</sub> . The maximum value for GSM signal strength is 31.		
21	Geo-Fence alert Fence ID	00	1	Indicates the geo-fence alert fence ID ;when no geo-fence alert, this value is fixed to '00'.		
22	Temperature Battery Voltage	1C0F66	3	0x1C is temperature, 0x1C = 28°C 0x0F66 is battery voltage, 0x0F66 = 3.942V		
23	IMEI	086460604088 8025	8			
24	CELL ID	0EE0	2	CELL ID of 3G device-high 16bit if 3G, Cell ID is 0x0EE0 0x1116 = 3808 4374 If 2G, Cell ID is 0x1116		
25	MCC	02CA	2	National Code, such as Panama is 714 <sub>(DEC)</sub> , 0x02CA <sub>(HEX)</sub> = 714 <sub>(DEC)</sub>		
26	MNC	14	1	Operators Code, such as Movistar is 20 <sub>(DEC)</sub> , 0x14 <sub>(HEX)</sub> = 20 <sub>(DEC)</sub>		
27	Serial number	C7	1	Serial number 199 <sub>(DEC)</sub> , Add 1 for each data sent; reset to 0x00 after 0xFF		

## 7.2 P45 - Lock and Unlock Report

### Report Description

**Note:** When parsing data, you need to convert hexadecimal data to ASCII format first.

This is Lock and Unlock Report, not a command. It's transmitted to GPS platform side automatically when Customers Swipe the RFID keys Or Lock/Unlock the Device. The GPS platform needs to send a (P46) command to acknowledge this report, otherwise the device will continue to send this report. In case of multiple event sources at the same time, the device will send one by one.

### Syntax

Response	(<Unit ID>,<P45,<Date>,<Time>,<Latitude>,<N/S Latitude indicator>,<Longitude>,<E/W Longitude indicator>,<GPS fix indicator>,<Speed>,<Direction>,<Even Source>,<Unlock successful/failed>,<RFID key number>,<Password True/False>,<Input Wrong Password Times>,<Report Serial number>)
----------	---

### Parameter Description

Parameters	Description
------------	-------------

<Date>	Report Date. format :DDMMYY 170219 means Feb. 17 <sup>th</sup> 2019
<Time>	Report Time .format: HHMMSS 162349 means 16:23:49 UTC time
<Latitude>	Latitude . format: DD.DDDDDD . The unit in degree
<N/S indicator> Latitude	N indicates Northern latitude; S indicates South latitude
<Longitude>	Longitude. format: DDD.DDDDDD. The unit in degree
<EW indicator> Longitude	E indicates East longitude ; W indicates West longitude
<GPS Validity>	A indicates GPS fix ; V indicates GPS signal invalid
<Speed>	GPS speed. Unit in KM/H (Kilometers per hour)
<Direction>	North is 0 degree, Clockwise counting .the unit in degree. range:0~359 degree
<Even Source>	1 indicates Swipe Authorized RFID key; 2 indicates Swipe Unauthorized RFID key; 3 indicates Swipe the vehicle ID blinding RFID key; 4 indicates Unlock by Password from GPRS; 5 indicates the device is automatically locked <b>6 indicates Unlock by Password from Bluetooth</b>
<Unlock successful/failed>	1 means the RFID key or password is verified, unlocked successfully, 0 means RFID key or password is not verified, refused to unlock <b>Note:</b> If <Even Source> is 2,3,5 ,this value is fixed to 0 .
<RFID key number>	The ID card number when swiping the card. <b>Note:</b> If the <Event Source> is 4 or 5, the value is 0000000000.
<Password True/False>	If the <Event Source> is 4, this value indicates whether the password is correct. If password is correct, it is 1, and for other types, it is fixed to 0.
<Input Wrong Password Times>	If the <Event Source> is 4, this value indicates the number of consecutive password input errors. For other types, it is fixed to 0.
<Report Serial number>	The serial number of the lock and unlock report, indicating the number of times the device sent the records.

### Example

#### Swipe Authorized RFID key

Response	(8043396604,P45,180219,184809,22.924088,N,114.540793,E,V,12.00,60,1,1,0006182080,0,0,35)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P45	Command Word
	180219	Feb. 18 <sup>th</sup> 2019
	184809	18:48:09. UTC time
	22.924088	Latitude

	N	Northern latitude
	114.540793	Longitude
	E	East longitude
	V	GPS invalid
	12.00	12 KM/H
	60	60° Direction
	1	Swipe Authorized RFID key
	1	RFID key is verified, unlocked successfully
	0006182080	RFID key number
	0	Password True/False. Fixed to '0'
	0	Input Wrong Password Times .Fixed to '0'
	35	The serial number of the lock and unlock report

**Unlock by Password**

Response (8043396604,P45,180219,184809,22.924088,N,114.540793,E,A,12.00,60,4,1,0000000000,1,0,36)

Response Description	Content	Description
	8043396604	Unit ID
	P45	Command Word
	180219	Feb. 18 <sup>th</sup> 2019
	184809	18:48:09 . UTC time
	22.924088	Latitude
	N	Northern latitude
	114.540793	Longitude
	E	East longitude
	A	GPS fix
	12.00	12 KM/H
	60	60° Direction
	4	Unlock by Password
	1	Password is verified, unlocked successfully
	0000000000	RFID key number. fixed to '0000000000'
	1	Password is correct
	0	Input Wrong Password Times
	36	The serial number of the lock and unlock report

**Sending Report Channel**

GPRS

## 7.3 Command Response

For the response content of all commands sent through the GPS platform, please refer to the Section:9 [GPS platform sends commands to device](#) Response content.

# 8 Device Send short message to Authorized Phone numbers

## 8.1 Position data short message Format

**Note:** Refer to [P02 -Query Current Position](#)

Example:

8043396604 ,09-28 12:11:02,Speed:0km/h,Battery:85%,GPS:3,Lock Close, http://maps.google.com/?q=22.549737,114.076685

NO.	Field Name	Example	Description
1	Unit ID	8043396604	
2	Separator	,	
3	Date time	09-28 12:11:02	Sep. 28 <sup>th</sup> 12:11:02 UTC time. Adjust this time by P10 command.
4	Separator	,	
5	GPS Speed	Speed:0km/h	
6	Separator	,	
7	Battery Level	Battery:85%	if charging power, will display: Charging
8	Separator	,	
9	Number of Capture satellites	GPS:3	Number of captured satellites
10	Separator	,	
11	Lock status	Lock Closed	Lock Status
12	Separator	“,”	
13	New line	0x0D 0x0A	Invisible character(New Line)

14	Google Map link	<a href="http://maps.google.com/?q=22.549737,114.076685">http://maps.google.com/?q=22.549737,114.076685</a>	22.549737 indicate Latitude, positive value north latitude, negative value south latitude; 114.076685 indicate longitude, positive value East Longitude, negative value West longitude.
----	-----------------	---	---

## 8.2 Alert data short message Format

### Lock rope tamper Alert Format

ALM, **Lock Rope Tamper**, 8043396604 ,09-28 12:03:43,Battery:95%,GPS:3, Lock Closed,<http://maps.google.com/?q=22.549737,114.076685>

### Swiping unauthorized RFID key Alert Format

ALM, **Swiping unauthorized RFID key**,8043396604 ,09-28 12:11:02,Battery:95%,GPS:3, Lock Closed,<http://maps.google.com/?q=22.549332,114.076561>

### Unlocking Alert Format

ALM,**Lock Open**,8043396604 ,09-28 12:11:02,Battery:95%,GPS:3, Lock Open,<http://maps.google.com/?q=22.549730,114.076615>

### Wrong Password Alert Format

ALM, **Wrong Password**,8043396604 ,09-28 12:11:02,Battery:95%,GPS:3, Lock Closed,<http://maps.google.com/?q=22.549656,114.076564>

### Vibration Alert Format

ALM,**Vibration**,8043396604 ,09-28 04:31:32,Battery:66%,GPS:3, Lock Closed,<http://maps.google.com/?q=22.549754,114.076250>

### Enter Geo-fence Alert Format

ALM,**Enter Geo-fence**,**Fence Name:Home**,8043396604 ,09-28 00:02:39,Battery:60%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549737,114.076685>

### Exit Geo-fence Alert Format

ALM, **Exit Geo-fence**,**Fence Name:Company**,8043396604 ,09-28 03:21:45,Battery:58%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549737,114.076685>

### Low Battery Alert Format

ALM,**Low Battery**, 8043396604 ,09-28 03:27:48,Battery:15%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549736,114.076588>

### Back cover Opened Alert Format

ALM,**Back Cover Opened**,8043396604 ,09-28 03:27:48,Battery:58%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549736,114.076677>

### Motor Fault Alert Format

ALM,**Moter Fault**,8043396604 ,09-28 03:27:48,Battery:58%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549736,114.076677>

## Jamming Alert Format

ALM,Gprs Jamming,8043396604 ,09-28 03:27:48,Battery:58%,GPS:3, Lock closed,<http://maps.google.com/?q=22.549736,114.076677>

No.	Field Name	Example	Description
1	Header	ALM	
2	Alert type	Lock Rope Tamper	
3	separator	,	
4	Unit ID	8043396604	
5	separator	,	
6	Date time	08-28 12:03:43	Aug 28 <sup>th</sup> 12:03:43 UTC time. Adjust this time by P10 command.
7	separator	,	
8	Battery	Battery:85%	
9	separator	,	
10	GPS signal	GPS:3	Number of captured satellites
11	Separator	,	
12	Lock open/close status	Lock closed	Lock Status
13	separator	,	
14	carriage return-linefeed	0x0D 0x0A	Invisible character(New Line)
15	Google Map link	<a href="http://maps.google.com/?q=22.549737,114.076685">http://maps.google.com/?q=22.549737,114.076685</a>	22.549737 mean latitude. Positive value is North latitude, negative value is South latitude. 114.076685 mean longitude. Positive value is East longitude, Negative value is West longitude

## 8.3 Command Response short message Format

For the response content of all commands sent through authorized Phone Numbers, please refer to the Section:9 [GPS platform sends commands to device](#) Response content.

**Note:** Short message and GPRS command response content format are the same.

# 9 GPS Platform Send Commands to Device

## Command Word List(ASCII)

Command Word	Description
<a href="#">P00</a>	Set/query Working Mode
<a href="#">P01</a>	Query Device Firmware Version
<a href="#">P02</a>	Query Current Position.
<a href="#">P04</a>	Set /Query Position data reporting time interval after device wake up and Device Timing wake up interval
<a href="#">P06</a>	Set/query SIM1 and SIM2 Communication Parameters
<a href="#">P09</a>	Set/query GPS and GSM indicators Control
<a href="#">P10</a>	Set /query the time difference of short message Position data
<a href="#">P11</a>	Set /query Authorized Phone Numbers that used to receive alert message /short message position data or sending SMS commands.
<a href="#">P12</a>	Enable or Disable the device to send SMS alerts to the specified Authorized Phone Numbers.
<a href="#">P13</a>	Restore factory setting of device. All parameters will be recovered to factory setting exclude Host IP address, port, APN, Authorized Phone numbers.
<a href="#">P14</a>	Query device's IMEI number
<a href="#">P15</a>	Reboot the device remotely. the device will restart after 30 sec when received this command.
<a href="#">P22</a>	Do time synchronization When the device continues to report invalid GPS signals and GPS time in the Position data
<a href="#">P24</a>	Set /query geo-fence name and enable/disable one of the geo-fence
<a href="#">P29</a>	Set or query the Fence Nodes of The Polygon Geo-fence
<a href="#">P30</a>	Delete fence Node information and geo-fence name for a fence ID
<a href="#">P31</a>	Inform the device that GPS platform/Serial port side has finished setting this Geo-fence, it can detect geo-fence alert now.
<a href="#">P32</a>	Force the device to go to sleep.
<a href="#">P35</a>	Acknowledge the alert or position data at GPS platform.
<a href="#">P36</a>	Set /query Vibration sensitivity coefficient threshold of Vibration alert.
<a href="#">P37</a>	Set /query Vibration Sensitivity Coefficient of Motion state detection. The smaller the acceleration value, the easier it is to detect the Motion state.
<a href="#">P38</a>	Set /query Interval of Unlocking alert.
<a href="#">P39</a>	Set /query working time after waking up
<a href="#">P40</a>	Set/query alert switch. The device supports 10 types of alerts. They are Lock rope tamper, swiping unauthorized RFID key, unlocking, wrong password, vibration, enter geo-fence, exit geo-fence, low battery, Back cover Opened and Motor Fault alerts

<a href="#">P41</a>	Authorized RFID key Management
<a href="#">P42</a>	Batch-Add Unlocking Authorized RFID
<a href="#">P43</a>	Unlock device by password.
<a href="#">P44</a>	Change the unlock password.
<a href="#">P46</a>	Acknowledge the Lock and Unlock Report data at GPS platform.
<a href="#">P50</a>	Enable or Disable the power switch on device mainboard.
<a href="#">P58</a>	Set/Query RFID unlocking related to geo-fence
<a href="#">P97</a>	Change the data acknowledgement mechanism. By default, all alert data and lock/unlock report - (P45) require the GPS platform to acknowledge them, otherwise the data will continue to be sent. With this command, you can configure these data without platform confirmation, or configure the maximum number of reports when the platform does not respond correctly.
<a href="#">P99</a>	Upgrade the Device's Firmware over the air.
<a href="#">P100</a>	Query device real-time status and GSM module version (2G/3G/4G)
<a href="#">P106</a>	Set/Query Can Unlock In The polygon Geo-fence
<a href="#">P108</a>	Set/Query Can Unlock In The POI(Point of Interest)
<a href="#">P110</a>	Set/Query G-Sensor filter function
<a href="#">P111</a>	Set/Query Working In Lock/Unlock Mode Reporting Data Time Interval
<a href="#">P112</a>	Enable/Disable Lock Rope Cut Reminder(Blink & Beep)
<a href="#">P113</a>	Enable/Disable Blind Area Data Packaging
<a href="#">P114</a>	Enable/Disable Base Station Positioning Function
<a href="#">P122</a>	Enable/Disable Bluetooth Function
<a href="#">P123</a>	Change the Unlock Password
<a href="#">P125</a>	Extract Data From Micro USB/Bluetooth (need firmare version 'T98EE_ .....')
<a href="#">P126</a>	Clear blind spot data
<a href="#">P127</a>	Extended power saving solution: turn off GPS module in idle time
<a href="#">P128</a>	Query Bluetooth Mac Address & Name & Version

## P00 - Set working mode

Command Description			
This command is used to set /query the working mode of the device.			
Syntax			
Read Command	(P00,<Action>)		
Response	(<Unit ID>,P00,<Working mode>)		
Write Command	(P00,<Action>,< Working mode >)		
Response	(<Unit ID>,P00,<Working mode>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Working mode>	0 SMS mode 1 Power saving mode 2 Real-time tracking mode 8 Lock/Unlock Mode	0,1,2,8	1
Example			
Query Working mode			
Read Command	(P00,0)		
Response	(8043396604,P00,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P00	Command Word	
	1	Working mode: Power saving mode	
Set Working mode to SMS Mode			
Write Command	(P00,1,0)		
Response	(8043396604,P00,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P00	Command Word	
	0	Working mode: SMS Mode	
Set Working mode to Power Saving Mode			
Write Command	(P00,1,1)		
Response	(8043396604,P00,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P00	Command Word	
	1	Working mode: Power saving mode	
Set Working mode to Real-time tracking mode			

Write Command	(P00,1,2)	
Response	(8043396604,P00,2)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P00	Command Word
	2	Working mode: Real-time tracking mode
<b>Set Working mode to Lock/Unlock mode</b>		
Write Command	(P00,1,8)	
Response	(8043396604,P00,8)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P00	Command Word
	8	Working mode: Lock/Unlock mode
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P01 - Query firmware version

<b>Command Description</b>			
Query Device Firmware Version			
<b>Syntax</b>			
Read Command	(P01)		
Response	(<Unit ID>,P01,<Firmware version>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
<Firmware version>	Device Firmware version		
<b>Example</b>			
Query Device Firmware Version			
Read Command	(P01)		
Response	(8043396604,P01,T98E_2019-03-13_13:41:57_V1.0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P01	Command Word	
	T98E_2019-03-13_13:41:57_V1.0	Firmware version	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

### Command Description

Query Current Position.

The device will respond the Position data(short message) to the Authorized Phone Number 1 if send this command via GPRS/Cellular Network; will respond the Position data(short message) to the Sending Authorized Phone Number if send this command via one of the Authorized Phone Number. The short message Position data format, Refer to Section [8.1 Position data short message format](#)

### Syntax

Read Command	(P02)
Response	<Unit ID>,<Date time>,<GPS Speed>,<Battery Level>,<Number of Capture satellites>,<Lock Status>,<Google Map link>

### Parameter Description

Parameters	Description	Value Range	Default
<Unit ID>	Device ID last 10 digit numbers of IMEI		
<Date time>	Report Date time. Format: MM-DD HH:MM:SS Adjust the Time difference of the short message by P10 command.		
<GPS Speed>	GPS speed . in KM/H		
<Battery Level>	Battery Level .	1%~100%	
<Number of Capture satellites>	Number of captured satellites.		
<Lock Status>	Lock Status. Locked or Unlocked		
<Google Map link>	Google Map link. Copy this link to Browser to check Detailed location.		

### Example

Query Current Position

Read Command	(P02)	
Response	8043396604,11-30 12:00:00,Speed:10km/h,Battery:50%,GPS:7,Lock Closed, http://maps.google.com/?q=22.549737,114.076685	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	11-30 12:00:00	November 30 <sup>th</sup> 12:00:00
	Speed:10km/h	GPS speed is 10km/h
	Battery:50%	Battery Level is 50%
	GPS:7	Number of captured satellites .7
	Lock Closed	Lock Status. Currently, It's Locked.
	http://maps.google.com/?q=22.549737,114.076685	Google Map link

### Sending Command Channel

GPRS SMS USB

## wake up interval

Command Description			
This command is used to set /query Position data reporting time interval after device wake up and Device Timing wake up interval			
Syntax			
Read Command	(P04,<Action>)		
Response	(<Unit ID>,P04, <Reporting time interval>,<Timing wake up interval>)		
Write Command	(P04,<Action>,<Reporting time interval>,<Timing wake up interval>)		
Response	(<Unit ID>,P04,<Reporting time interval>,<Timing wake up interval>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Reporting time interval>	Position data reporting time interval after wake up. unit in seconds	5~600	30
<Timing wake up interval>	Timing wake up interval.unit in minutes	30~1440	30
Example			
Query Position data reporting time interval after wake up and Timing wake up interval			
Read Command	(P04,0)		
Response	(8043396604,P04,30,30)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P04	Command Word	
	30	Reporting time interval is 30 sec	
	30	Timing wake up interval is 30 minutes.	
Set Position data reporting time interval to 60 sec , and Timing wake up interval to 120 minutes.			
Write Command	(P04,1,60,120)		
Response	(8043396604,P04,60,120)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P04	Command Word	
	60	Reporting time interval is 60 sec	
	120	Timing wake up interval is 120 minutes.	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P06 - Set/Query SIM1's IP Port and GPRS/Cellular network Parameters

Command Description			
<p>This command is used to set /query SIM Card 1's host IP address(Domain Name)/Port/APN and APN account.</p> <p>Note:</p> <p>The device can be installed with two Micro SIM cards and supports the dual SIM single standby mode. The device will automatically select a SIM card to register the network.</p> <p><b>When modifying IP, port, APN, ID information, the blind area will be cleared.</b></p>			
Syntax			
Read Command	(P06,<Action>)		
Response	(<Unit ID>,P06,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Write Command	(P06,<Action>,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Response	(<Unit ID>,P06,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Host IP address/Domain Name>	Hosting IP address: 52.74.44.145 Domain Name: trackgpstrack.in		52.74.44.145
<TCP port>	TCP Port number of the remote host server.	0~65530	12000
<APN>	Access Point Name. e.g. China Mobile APN is airtelgprs.com	Up to 50 characters	airtelgprs.com
<APN user>	The APN username to access GPRS network.	Up to 50 characters	
<APN pass>	The APN password to access GPRS network.	Up to 50 characters	
<SIM card Number>	SIM card Number. 0 SIM1 1 SIM2	0~1	0
Example			
query SIM Card 1's host IP address(Domain Name)/Port/APN and APN account			
Read Command	(P06,0)		
Response	(8043396604,P06, 52.74.44.145,8614,airtelgprs.com,,,0) or (8043396604,P06,tracker.trackgpstrack.intracking.com,8614,airtelgprs.com,,,0)		
Response Description	Content	Description	
	8043396604	Unit ID	

	P06	Command Word
	52.74.44.145	Host IP address
	tracker.trackgpstrack.intracking.com	Domain Name
	8614	TCP port
	airtelgprs.com	APN Note: here ,no APN account. Keep the APN user and pass blank
	0	SIM card 1

Set SIM Card 1's host IP address: 52.74.44.145 ,TCP port: 1156 , APN: internet ,APN user: gprs  
APN pass: web

Write Command	(P06,1,52.74.44.145,1156,internet,gprs,web)	
Response	(8043396604,P06,52.74.44.145,1156,internet,gprs,web,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P06	Command Word
	52.74.44.145	Host IP address
	1156	TCP port
	internet	APN
	gprs	APN username
	web	APN password
	0	SIM card 1

Set SIM Card 1's host Domain Name : trackgpstrack.in,TCP port: 1156 , APN: internet ,APN user and pass are blank.

Write Command	(P06,1,tracker.trackgpstrack.intracking.com,1156,internet,,)	
Response	(8043396604,P06,tracker.trackgpstrack.intracking.com,1156,internet,,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P06	Command Word
	tracker.trackgpstrack.intracking.com	Domain Name
	1156	TCP port
	internet	APN .
		APN username is blank
		APN password is blank
	0	SIM card 1

Sending Command Channel

GPRS SMS USB

## P06 - Set/Query SIM2's IP Port and GPRS/Cellular network Parameters

Command Description			
This command is used to set /query SIM Card 2's host IP address(Domain Name)/Port/APN and APN account.			
Note:			
The device can be installed with two Micro SIM cards and supports the dual SIM single standby mode. The device will automatically select a SIM card to register the network.			
Syntax			
Read Command	(P06, <Action>)		
Response	(<Unit ID>,P06,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Write Command	(P06,<Action>,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Response	(<Unit ID>,P06,<Host IP address/Domain Name>,<TCP port>,<APN>,<APN user>,<APN pass>,<SIM card Number>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	2 Query the previous setting 3 Write the Parameters	2~3	
<Host IP address/Domain Name>	Hosting IP address: 52.74.44.145 Domain Name: tracker.trackgpstrack.intracking.com		52.74.44.145
<TCP port>	TCP Port number of the remote host server.	0~65530	12000
<APN>	Access Point Name. e.g. China Mobile APN is airtelgprs.com	Up to 50 characters	airtelgprs.com
<APN user>	The APN username to access GPRS network.	Up to 50 characters	
<APN pass>	The APN password to access GPRS network.	Up to 50 characters	
<SIM card Number>	SIM card Number. 0 SIM1 1 SIM2	0~1	1
Example			
query SIM Card 2's host IP address(Domain Name)/Port/APN and APN account			
Read Command	(P06,2)		
Response	(8043396604,P06,52.74.44.145,8614,airtelgprs.com,,,1) or (8043396604,P06,tracker.trackgpstrack.intracking.com,8614,airtelgprs.com,,,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P06	Command Word	
	52.74.44.145	Host IP address	
	tracker.trackgpstrack.intracking.com	Domain Name	
8614	TCP port		

	airtelgprs.com	APN . Note: here ,no APN account. Keep the APN user and pass blank
	1	SIM card 2
Set SIM Card 2's host IP address: 52.74.44.145 ,TCP port: 1156 , APN: internet ,APN user: gprs APN pass: web		
Write Command	(P06,3,52.74.44.145,1156,internet,gprs,web)	
Response	(8043396604,P06,52.74.44.145,1156,internet,gprs,web,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P06	Command Word
	52.74.44.145	Host IP address
	1156	TCP port
	internet	APN .
	gprs	APN username
	web	APN password
	1	SIM card 2
Set SIM Card 2's host Domain Name : trackgpstrack.in,TCP port: 1156 , APN: internet ,APN user and pass are blank.		
Write Command	(P06,3,tracker.trackgpstrack.intracking.com,1156,internet,,)	
Response	(8043396604,P06,tracker.trackgpstrack.intracking.com,1156,internet,,,1)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P06	Command Word
	tracker.trackgpstrack.intracking.com	Domain Name
	1156	TCP port
	internet	APN .
		APN username is blank
		APN password is blank
	1	SIM card 2
Sending Command Channel		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

### Command Description

This command is used to turn on or turn off GPS and GSM indicators.

After turn off the GPS and GSM indicators, they will remain off regardless of whether the device is working properly or not.

After turn on them, they will continue to work according to the original indicator definition state mode.

### Syntax

Read Command	(P09,<Action>)
Response	(<Unit ID>,P09,<Turn On/Off indicator>)
Write Command	(P09,<Action>,<Turn On/Off indicator>)
Response	(<Unit ID>,P09,<Turn On/Off indicator>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Turn On/Off indicator>	0 indicates Turn off GPS and GSM indicators; 1 indicates Turn on GPS and GSM indicators	0~1	1

### Example

Query GPS and GSM indicators Control Status

Read Command	(P09,0)		
Response	(8043396604,P09,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P09	Command Word	
	1	Turn on GPS and GSM indicators	

Turn off GPS and GSM indicators

Write Command	(P09,1,0)		
Response	(8043396604,P09,0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P09	Command Word	
	0	Turn off GPS and GSM indicators	

### Sending Command Channel

GPRS  SMS  USB

## alert

Command Description			
This command is used to set /query the time difference of GPRS position data and SMS alert.			
Syntax			
Read Command	(P10,<Action>)		
Response	(<Unit ID>,P10,<GPRS/SMS time difference>)		
Write Command	(P10,<Action>,<time difference>)		
Response	(<Unit ID>,P10, <GPRS/SMS time difference>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting (GPRS) 1 Write the Parameters (GPRS) 2 Query the previous setting (SMS) 3 Write the Parameters (SMS)	0~3	
<GPRS time difference> Or <SMS time difference>	the time difference of short message Position data. Unit in minutes. E.g. UTC +08:00    8*60=480 UTC -05:30    5*60+30=-330	-720~780	0
Example			
Query the time difference of GPRS Position data			
Read Command	(P10,0)		
Response	(8043396604,P10,480)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P10	Command Word	
	480	GPRS time difference. UTC+08:00	
Set the time difference of GPRS Position data to UTC -03:00. time difference is -180			
Write Command	(P10,1,-180)		
Response	(8043396604,P10,-180)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P10	Command Word	
	-180	GPRS time difference. UTC-03:00	
Query the time difference of SMS alert			

Read Command	(P10,2)	
Response	(8043396604,P10,480)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P10	Command Word
	480	SMS time difference. UTC+08:00
Set the time difference of SMS alert to UTC -03:00. time difference is -180		
Write Command	(P10,3,-180)	
Response	(8043396604,P10,-180)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P10	Command Word
	-180	SMS time difference. UTC-03:00
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P11 - Set/Query Authorized Phone Numbers

### Command Description

This command is used to set /query Authorized Phone Numbers that used to receive alert message /short message position data or sending SMS commands. **The device does not respond when the mobile number is not registered.**

### Syntax

Read Command	(P11,<Action>,<Authorized Phone number index>)
Response	(<Unit ID>,P11,<Authorized Phone number index>,<Authorized Phone number>)
Write Command	(P11,<Action>,<Authorized Phone number index>,<Authorized Phone number >)
Response	(<Unit ID>,P11,<Authorized Phone number index>,<Authorized Phone number >)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Authorized Phone number index>	Up to 5 Authorized Phone numbers.	1~5	0
<Authorized Phone number>	phone number, can not exceed 15 digit numbers, add country code at front, e.g. China is 86 or +86.		

### Example

Query The first Authorized Phone number

Read Command	(P11,0,1)	
Response	(8043396604,P11,1,8615017931001)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P11	Command Word
	1	Index, Authorized Phone number1
	8615017931001	Authorized Phone number

Set the Authorized Phone number 2 to 8615017931001

Write Command	(P11,1,2,8615017931001)	
Response	(8043396604,P11,2,8615017931001)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P11	Command Word
	2	Index, Authorized Phone number2
	8615017931001	Authorized Phone number

### Sending Command Channel

GPRS  SMS  USB

## P12 - Enable or Disable the device to send SMS alerts to the specified Authorized Phone number

Command Description			
This command is used to enable or disable the device to send SMS alerts to the specified Authorized Phone Number. by default, The device only sends SMS alert information to Authorized Phone Number1 and Authorized Phone Number 2.			
Syntax			
Read Command	(P12,<Action>)		
Response	(<Unit ID>,P12,<Enable/Disable Phone Number1>,<Enable/Disable Phone Number2>,<Enable/Disable Phone Number3>,<Enable/Disable Phone Number4>,<Enable/Disable Phone Number5>)		
Write Command	(P12,<Action>,<Enable/Disable Phone Number1>,<Enable/Disable Phone Number2>,<Enable/Disable Phone Number3>,<Enable/Disable Phone Number4>,<Enable/Disable Phone Number5>)		
Response	(<Unit ID>,P12,<Enable/Disable Phone Number1>,<Enable/Disable Phone Number2>,<Enable/Disable Phone Number3>,<Enable/Disable Phone Number4>,<Enable/Disable Phone Number5>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable Phone Number1>	0 indicates Disable the device to send SMS alerts to the specified Authorized Phone number1; 1 indicates Enable the device to send SMS alerts to the specified Authorized Phone number 1.	0~1	1
<Enable/Disable Phone Number2>	0 indicates Disable the device to send SMS alerts to the specified Authorized Phone number 2; 1 indicates Enable the device to send SMS alerts to the specified Authorized Phone number 2.	0~1	1
<Enable/Disable Phone Number3>	0 indicates Disable the device to send SMS alerts to the specified Authorized Phone number 3; 1 indicates Enable the device to send SMS alerts to the specified Authorized Phone number 3.	0~1	0
<Enable/Disable Phone Number4>	0 indicates Disable the device to send SMS alerts to the specified Authorized Phone number 4; 1 indicates Enable the device to send SMS alerts to the specified Authorized Phone number 4.	0~1	0
<Enable/Disable Phone Number5>	0 indicates Disable the device to send SMS alerts to the specified Authorized Phone number 5; 1 indicates Enable the device to send SMS alerts to the specified Authorized Phone number 5.	0~1	0

### Example

Query the configuration of the Authorized Phone number receiving SMS alert

Read Command	(P12,0)	
Response	(8043396604,P12,1,1,0,0,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P12	Command Word
	1	Authorized Phone number1 Enable to accept SMS alert
	1	Authorized Phone number2 Enable to accept SMS alert
	0	Authorized Phone number3 Disable to accept SMS alert
	0	Authorized Phone number4 Disable to accept SMS alert
0	Authorized Phone number5 Disable to accept SMS alert	

Set the specified Authorized Phone number 1,2,3 to accept the SMS alert

Write Command	(8043396604,P12,1,1,1,1,0,0)	
Response	(8043396604,P12,1,1,1,0,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P12	Command Word
	1	Authorized Phone number1 Enable to accept SMS alert
	1	Authorized Phone number2 Enable to accept SMS alert
	1	Authorized Phone number3 Enable to accept SMS alert
	0	Authorized Phone number4 Disable to accept SMS alert
0	Authorized Phone number5 Disable to accept SMS alert	

### Sending Command Channel

GPRS SMS USB

## P13 - Restore Factory setting

Command Description			
Restore factory setting of device. All parameters will be recovered to factory setting exclude Host IP address, port, APN, Authorized Phone numbers.			
Syntax			
Read Command	(P13)		
Response	(<Unit ID>,P13)		
Parameter Description			
Parameters	Description	Value Range	Default
-	-	-	-
Example			
Restore factory setting of device			
Read Command	(P13)		
Response	(8043396604,P13)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P13	Command Word	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P14 - Read device's IMEI number

Command Description			
Query device's IMEI number			
Syntax			
Read Command	(P14)		
Response	(8043396604,P14,860298043396604)		
Parameter Description			
Parameters	Description	Value Range	Default
-	-	-	-
Example			
Query device's IMEI number			
Read Command	(P14)		
Response	(8043396604,P14,860298043396604)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P14	Command Word	
	860298043396604	IMEI	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P15 - Reboot the device remotely

Command Description			
Reboot the device remotely. the device will restart after 30 sec when received this command.			
Syntax			
Read Command	(P15)		
Response	(8043396604,P15)		
Parameter Description			
Parameters	Description	Value Range	Default
-	-	-	-
Example			
Reboot the device remotely			
Read Command	(P15)		
Response	(8043396604,P15)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P15	Command Word	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P22 - Time Synchronization

### Command Description

This command is used to do time synchronization When the device continues to report invalid GPS signals and GPS time in the Position data. If the device is currently acquiring GPS signals normally, this command will not take effect.

### Syntax

Write Command	(P22,<Date Time>)
Response	(<Unit ID>,P22,<Successful/failed>)

### Parameter Description

Parameters	Description	Value Range	Default
<Date Time>	Year/Month/Day/Hour/Minute/Second, and it is UTC time. Format as below: YYYYMMDDHHMMSS		
<successful/failed>	1 indicates successful; 0 indicates failed	0~1	

### Example

Set the device's Position data's Date time to 2019/03/18 16:43:28 (UTC)

Write Command	(P22,20190318164328)
Response	(8043396604,P22,1)

Response Description	Content	Description
	8043396604	Unit ID
	P22	Command Word
	1	Set successfully; if this value is 0 ,means Set unsuccessfully.

### Sending Command Channel

GPRS SMS USB

## P24 - Set/Query Geo-fence name and enable/disable one of fence ID

Command Description			
This command is used to set or query geo-fence name and enable/disable one of the geo-fence.			
Syntax			
Read Command	(P24,<Action>,<Fence ID index>,<Enable/Disable>,<Geo-fence Name>)		
Response	(<Unit ID>,P24, <Fence ID index>,<Enable/Disable>,<Geo-fence Name>)		
Write Command	(P24,<Action>,<Fence ID index>)		
Response	(<Unit ID>,P24,<Fence ID index>,<Enable/Disable>,<Geo-fence Name>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Fence ID index>	Geo-fence ID index. The device supports at most 10 Fences.	1~10	
<Enable/Disable>	Enable/Disable specified Fence ID 1 means Enable ; 0 means Disable	0~1	
<Geo-fence Name>	The fence name of the specified fence ID. Up to 30 characters, only numbers and letters are supported	Up to 30 characters	
Example			
Query fence ID 10's Geo-fence name and Geo-fence Enable/Disable Status			
Read Command	(P24,0,10)		
Response	(8043396604,P24,10,1,companyaddress001)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P24	Command Word	
	10	Fence ID	
	1	Enable	
	companyaddress001	Fence Name	
Set fence ID 1's geo-fence name to 'long gang road144' and Enable its function			
Write Command	(P24,1,1,1,long gang road144)		
Response	(8043396604,P24,1,1,long gang road144)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P24	Command Word	
	1	Fence ID	
	1	Enable	
	long gang road144	Fence Name	

Disable fence ID 05's Geo-fence function		
Write Command	(P24,1,5,0,)	
Response	(8043396604,P24,5,0,home)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P24	Command Word
	5	Fence ID
	0	Disable
	home	Fence Name
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P29 - Set/Query the Fence Nodes of The Polygon Geo-fence

Command Description			
This command is used to set or query the Fence Nodes of The Polygon Geo-fence, at most 10 Polygon Fences.			
Syntax			
Read Command	(P29,<Action>,<Fence ID index>,<Fence Node Page index >)		
Response	(<Unit ID>,P29,<Fence ID index>,<Total Nodes>,<Fence Node Page index >,<Total Nodes in this Page ID>,< Fence Node...>)		
Write Command	(P29,<Action>,<Fence ID index>,<Fence Node Page index >,<Total Nodes in this Page ID>,< Fence Node...>)		
Response	(<Unit ID>,P29,<Fence ID index>,<Total Nodes>,<Fence Node Page index >,<Total Nodes in this Page ID>,< Fence Node...>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Fence ID index>	Geo-fence ID index. The device supports at most 10 Fences.	1~10	
<Total Nodes>	Total Nodes in this Fence ID. Up to 50 Nodes	0~50	
<Fence Node Page index >	Fence Node Page index. One Page saves 10 Fence Nodes. 1 Fence Node includes the longitude and latitude info.	1~5	
<Total Nodes in this Page ID>	Total Nodes in this Page ID. Up to 10 Nodes in one Page	0~10	
< Fence Node...>	Node information, nodes must appear in pairs, that is, one longitude and one latitude appear in pairs, one longitude and one latitude constitute a complete point, and the node information appears in the form of DDDMM.MMMM,DDMM.MMMM. Up to 5 pages can be set to 50 points. East Longitude or Northern latitude: Positive value. e.g. 11414.9742,2242.0727 West Longitude or South latitude: Negative value e.g. -4815.2106,-2019.3663		
Example			
Query fence ID 5 all Page 's Fence Node info.			
<b>Note:</b> To get the whole fence nodes. User need to query fence node from page 1 to 5.			
Read Command	(P29,0,5,1) (P29,0,5,2) (P29,0,5,3) (P29,0,5,4)		

	(P29,0,5,5)	
Response	<p><b>Note:</b> There is no newline in the actual received command content. The newline in the example is due to document layout.</p> <p>(8043396604,P29,5,32,1,10,11414.9742,2242.0727,11415.0952,2242.2437,11415.1647,2242.2959,11415.3398,2242.3506,11415.4814,2242.3814,11415.9784,2242.3886,11416.1020,2242.3957,11416.2668,2242.4028,11416.3517,2242.3838,11416.4702,2242.3054)</p> <p>(8043396604,P29,1,32,2,10,11416.4882,2242.2627,11416.5475,2242.1676,11416.5552,2242.1130,11416.5423,2241.8945,11416.5371,2241.8303,11416.5785,2241.7404,11416.5166,2241.7235,11416.4213,2241.6664,11416.2925,2241.6047,11416.1303,2241.4431)</p> <p>(8043396604,P29,1,32,3,10,11416.0428,2241.3861,11416.0016,2241.3481,11415.9243,2241.3434,11415.7441,2241.3837,11415.5716,2241.4407,11415.4300,2241.5025,11415.3449,2241.5833,11415.1879,2241.6926,11414.9896,2241.7187,11414.8274,2241.7567)</p> <p>(8043396604,P29,1,32,4,2,11414.7579,2241.8327,11414.7862,2241.9563)</p> <p>(8043396604,P29,1,32,5,2,0,0,0,0)</p>	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P29	Command Word
	5	Fence ID
	32	Total 32 Fence Nodes in fence ID 5
	1	Fence Node Page ID= 1 Page Index 1 to 5
	10	Total 10 Fence Nodes in Fence Node Page 1
	11414.9742,2242.0727	first Node. Longitude and Latitude. 11414.9742 DDDMM.MMMM Change the longitude to degree: $114+14.9742/60=114+0.24957=114.249570$ It's a positive value. Means East Longitude. If -11414.9742 means West Longitude  2242.0727 DDMM.MMMM Change the latitude to degree: $22+42.0727/60=22+ 0.7012116=22.701211$ It's a positive value. Means Northern latitude. If -2242.0727 means South latitude
	11415.0952,2242.2437	The Second Node. Longitude and Latitude
	...	From the third Node to 9 <sup>th</sup> Node
	11416.4702,2242.3054	The 10 <sup>th</sup> Node. Longitude and Latitude

Set fence Nodes for Fence ID 2. Total 17 Nodes

If less than 10 Nodes. Just send one command;

If less than 20 Nodes, need send two commands.

**Note:** Write longitude and latitude `-4815.2106,-2019.3663`,

Response longitude and latitude `-4815.2105,-2019.3662`

The last value is different between Write and Response message. This is because the longitude error caused by the conversion of latitude and longitude units is within the allowable range.

Write Command

**Note:** When the instruction is actually sent, there should be no line breaks in the content of the instruction. The newline in the example is because of the need for document layout

```
(P29,1,2,1,10,-4815.2106,-2019.3663,-4810.1020,-2016.2750,-4806.6413,-2014.4198,-4802.8510,-2013.4920,-4758.0719,-2012.7188,-4754.7760,-2012.8735,-4750.4914,-2016.1204,-4749.6674,-2019.0572,-4749.6674,-2021.0660,-4750.3266,-2024.0012)
```

```
(P29,1,2,2,7,-4750.3266,-2026.6266,-4750.6561,-2029.5601,-4752.6337,-2030.4862,-4759.5551,-2029.5601,-4809.6076,-2028.4794,-4814.8810,-2026.3178,-4817.8473,-2021.9930)
```

Response

**Note:** There is no newline in the actual received command content. The newline in the example is due to document layout.

```
(8043396604,P29,2,10,1,10,-4815.2105,-2019.3662,-4810.1019,-2016.2749,-4806.6412,-2014.4197,-4802.8509,-2013.4919,-4758.0718,-2012.7187,-4754.7759,-2012.8734,-4750.4913,-2016.1203,-4749.6673,-2019.0571,-4749.6673,-2021.0659,-4750.3265,-2024.0011)
```

```
(8043396604,P29,2,17,2,7,-4750.3265,-2026.6265,-4750.6560,-2029.5600,-4752.6336,-2030.4861,-4759.5550,-2029.5600,-4809.6075,-2028.4793,-4814.8809,-2026.3177,-4817.8472,-2021.9929)
```

Response Description

Content	Description
8043396604	Unit ID
P24	Command Word
2	Fence ID
17	Total 17 Nodes in Fence ID 2
2	Page ID 2
7	Total 7 Nodes in Page ID 2
-4750.3265,-2026.6265	first Node in page ID 2 Longitude and Latitude. -4750.3265 DDDMM.MMMM Change the longitude to degree: $-(47+50.3265/60)=- (47+0.838775)=-47.838775$ It's a negative value. Means West Longitude If 4750.3265 means East Longitude.  -2026.6265 DDMM.MMMM Change the latitude to degree: $-(20+26.6265/60)=- (20+0.443775)=-20.443775$ It's a negative value.. Means South latitude

		If 2026.6265 means Northern latitude.
	...	From the second Node to 6 <sup>th</sup> Node
	-4817.8472,-2021.9929	The 7 <sup>th</sup> Node. Longitude and Latitude
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

### Command Description

This command is used to delete fence Node information and geo-fence name for a fence ID

### Syntax

Write Command	(P30,<Fence ID index>)
Response	(<Unit ID>,P30,<Successful/failed>)

### Parameter Description

Parameters	Description	Value Range	Default
<Fence ID index>	Geo-fence ID index. The device supports at most 10 Fences.	1~10	
<successful/failed>	1 indicates Delete successfully; 0 indicates failed	0~1	

### Example

Delete fence Node information and geo-fence name for Fence ID 5

Write Command	(P30,5)		
Response	(8043396604,P30,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P30	Command Word	
	1	1 indicates Erase successfully; 0 indicates failed	

### Sending Command Channel

GPRS SMS USB

### Command Description

This command is used to inform the device that GPS platform/Serial port side has finished setting this Geo-fence,it can detect geo-fence alert now.

### Syntax

Write Command	(P31)
Response	(<Unit ID>,P31)

### Parameter Description

Parameters	Description	Value Range	Default
-	-		

### Example

Inform the device that GPS platform/Serial port side has finished setting this Geo-fence

Write Command	(P31)		
Response	(8043396604,P31)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P31	Command Word	

### Sending Command Channel

GPRS SMS USB

## Command Description

This command is used to force the device to go to sleep.

**Note:** After the device receives this command for 30 seconds, it goes to sleep.

If the current device is in the process of unlocking or locking, wait for the operation to end, then go to sleep again.

## Syntax

Write Command	(P32)
Response	(<Unit ID>,P32)

## Parameter Description

Parameters	Description	Value Range	Default
-	-		

## Example

Force the device to go to sleep

Write Command	(P32)	
Response	(8043396604,P32)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P32	Command Word

## Sending Command Channel

GPRS SMS USB

## Command Description

This command is used to acknowledge the alert or position data at GPS platform.

**Note:** The device will keep on sending the same alert or position data if didn't receive the acknowledge command from GPS platform .

Whether the position data need to be acknowledge need to decode the ACK bit in Position data.

## Syntax

Write Command	(P35)
Response	(<Unit ID>,P35)

## Parameter Description

Parameters	Description	Value Range	Default
-	-		

## Example

GPS platform send below command to acknowledge the alert or position data from device side.

Write Command	(P35)	
Response	(8043396604,P35)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P35	Command Word

## Sending Command Channel

GPRS SMS USB

## alert and repeated interval

### Command Description

This command is used to set /query Vibration sensitivity coefficient threshold of Vibration alert. And minimum time interval for repeated vibration alarms. The greater the acceleration value, the harder it is to detect the vibration alarm.

### Syntax

Read Command	(P36,<Action>)
Response	(<Unit ID>,P36,<Acceleration threshold/interval for repeated>)
Write Command	(P36,<Action>,< Acceleration threshold/interval for repeated>)
Response	(<Unit ID>,P36, <Acceleration threshold/interval for repeated>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters 2 Query the interval for repeated vibration alarms 3 Write the interval for repeated vibration alarms	0~3	
<Acceleration threshold>	Vibration alert acceleration threshold. The greater the acceleration value, the harder it is to detect the vibration alarm. Unit in mg. suggest 500 to 900mg. default 500 mg.	500~8000	500
<interval for repeated>	Minimum time interval for repeated vibration alarms. The unit is seconds. Default 600 seconds.	1~65535	600

### Example

Query Vibration sensitivity coefficient threshold of Vibration alert.

Read Command	(P36,0)		
Response	(8043396604,P36,500)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P36	Command Word	
	500	Vibration alert acceleration threshold.500mg	

Set Vibration sensitivity coefficient threshold of Vibration alert to 700mg

Write Command	(P36,1,700)		
Response	(8043396604,P36,700)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P36	Command Word	
	700	Vibration alert acceleration threshold.700mg	

Query the interval for repeated vibration alarms		
Read Command	(P36,2)	
Response	(8043396604,P36,600)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P36	Command Word
	600	Minimum time interval for repeated vibration alarms.600 seconds.
Query the interval for repeated vibration alarms		
Write Command	(P36,3,60)	
Response	(8043396604,P36,60)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P36	Command Word
	60	Minimum time interval for repeated vibration alarms.60 seconds.
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P37 - Set/Query Vibration Sensitivity Coefficient of Motion state detection

Command Description			
<p>This command is used to set /query Vibration Sensitivity Coefficient of Motion state detection. The smaller the acceleration value, the easier it is to detect the Motion state.</p> <p><b>Note:</b> if the motion acceleration value is 0 ,means disable motion detection function. And Vibration or Moving can't be wake up the device in future. Restore this function by setting other motion acceleration values.</p>			
Syntax			
Read Command	(P37,<Action>)		
Response	(<Unit ID>,P37,<Acceleration threshold>)		
Write Command	(P37,<Action>,< Acceleration threshold>)		
Response	(<Unit ID>,P37,< Acceleration threshold>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Motion Acceleration Value>	Vibration Sensitivity Coefficient of Motion state detection. The smaller the acceleration value, the easier it is to detect the vibration. Unit in mg. suggest 63 to 500. default 126 mg. 0 indicates Disable motion detection function.	0 or 63~500	126
Example			
Query Vibration Sensitivity Coefficient of Motion state detection			
Read Command	(P37,0)		
Response	(8043396604,P37,126)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P37	Command Word	
	126	Motion Acceleration Value.126mg	
Set Vibration Sensitivity Coefficient of Motion state detection to 63 mg			
Write Command	(P37,1,63)		
Response	(8043396604,P37,63)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P37	Command Word	
	63	Motion Acceleration Value.63mg	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P38 - Set/Query Interval of Unlocking alert

### Command Description

This command is used to set /query Interval of Unlocking alert.

When the device is unlocked, an unlock alert is generated immediately. When the device is always unlocked, you can set the alert to be reported again at this interval.

### Syntax

Read Command	(P38,<Action>)
Response	(<Unit ID>,P38,<Unlock alert interval>)
Write Command	(P38,<Action>,< Unlock alert interval>)
Response	(<Unit ID>,P38, <Unlock alert interval>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Unlock alert interval>	Unlock alert interval. Unit in minutes.	3~180	120

### Example

Query Interval of Unlocking alert

Read Command	(P38,0)		
Response	(8043396604,P38,120)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P38	Command Word	
	120	Unlock alert interval.120 minutes	

Set Interval of Unlocking alert to 3 minutes

Write Command	(P38,1,3)		
Response	(8043396604,P38,3)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P38	Command Word	
	3	Unlock alert interval.3 minutes	

### Sending Command Channel

GPRS SMS USB

## P39 - Set/Query Working time after waking up

### Command Description

This command is used to set /query working time after waking up.

#### Note:

The device can be woken up by vibrating/swipe the RFID key/unlock (lock)/timed condition. For example, after the device vibration wakes up, it will work according to the preset working time. During the wake-up period, if the lock is unlocked, the time is accumulated again from the unlocking time; if it is continuously in the vibration state, the device continues to work until the device detects no wake-up condition, Then go to sleep.

### Syntax

Read Command	(P39,<Action>)
Response	(<Unit ID>,P39,<Working time>)
Write Command	(P39,<Action>,<Working time>)
Response	(<Unit ID>,P39,<Working time>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
< Working time>	Working time after waking up. Unit in minutes.	3~10	10

### Example

Query Working time after waking up

Read Command	(P39,0)		
Response	(8043396604,P39,10)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P39	Command Word	
	10	Working time after waking up.10 minutes	

Set Working time after waking up to 5 minutes

Write Command	(P39,1,5)		
Response	(8043396604,P39,5)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P39	Command Word	
	5	Working time after waking up .5 minutes	

### Sending Command Channel

GPRS SMS USB

## P40 - Set/Query Alert Switch

### Command Description

This command is used to set /query alert switch.

The device supports 10 types of alerts. They are Lock rope tamper, swiping unauthorized RFID key, unlocking, wrong password, vibration, enter geo-fence, exit geo-fence, low battery, Back cover Opened and Motor Fault alerts.

### Syntax

Read Command	(P40,<Action>)
Response	(<Unit ID>,P40,<Lock rope tamper alert>,<Swiping unauthorized RFID key alert>,<Unlocking alert>,<Wrong password alert>,<Vibration alert>,<Enter geo-fence alert>,<Exit geo-fence alert >,<Low battery alert>,< Back cover Opened alert>,<Motor Fault alert>)
Write Command	(P40,<Action>,<Lock rope tamper alert>,<Lock rope tamper alert>,<Swiping unauthorized RFID key alert>,<Unlocking alert>,<Wrong password alert>,<Vibration alert>,<Enter geo-fence alert>,<Exit geo-fence alert>,<Low battery alert>,< Back cover Opened alert>,<Motor Fault alert>)
Response	(<Unit ID>,P40,<Lock rope tamper alert>,<Swiping unauthorized RFID key alert>,<Unlocking alert>,<Wrong password alert>,<Vibration alert>,<Enter geo-fence alert>,<Exit geo-fence alert >,<Low battery alert>,< Back cover Opened alert>,<Motor Fault alert>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Lock rope tamper alert>	Lock rope tamper alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Swiping unauthorized RFID key alert>	Swiping unauthorized RFID key alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Unlocking alert>	Unlocking alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Wrong password alert>	Wrong password alert switch: send the Unlock command with wrong password more than 5 times. 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS	0~3	1

	3 indicates Enable alert transmitting via GPRS and SMS		
<Vibration alert>	Vibration alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	0
<Enter geo-fence alert>	Enter Geo-fence alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Exit geo-fence alert>	Exit Geo-fence alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Low battery alert>	Low Battery alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Back cover Opened alert>	Back Cover Opened alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Motor Fault alert>	Motor Fault alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1
<Jamming alert>	Motor Fault alert switch 0 indicates Disable alert transmitting via GPRS and SMS 1 indicates Enable alert transmitting via GPRS 2 indicates Enable alert transmitting via SMS 3 indicates Enable alert transmitting via GPRS and SMS	0~3	1

### Example

Query Alert switch setting

Read Command

(P40,0)

Response

(8043396604,P40,1,0,1,1,0,1,1,1,1,1,1)

Response Description

**Content**

**Description**

8043396604

Unit ID

	P40	Command Word
	1	Enable Lock rope tamper alert transmitting via GPRS channel
	0	Disable Swiping unauthorized RFID key alert transmitting
	1	Enable Unlocking alert transmitting via GPRS channel
	1	Enable Wrong password alert transmitting via GPRS channel
	0	Disable Vibration alert transmitting
	1	Enable Enter geo-fence alert transmitting via GPRS channel
	1	Enable Exit geo-fence alert transmitting via GPRS channel
	1	Enable Low battery alert transmitting via GPRS channel
	1	Enable Back cover Opened alert transmitting via GPRS channel
	1	Enable Motor Fault alert transmitting via GPRS channel.
	1	Enable Jamming alert transmitting via GPRS channel.

Set Alert switch For Each alert types

Write Command	(P40,1,3,0,3,1,0,1,1,1,1,1,1)	
Response	(8043396604,P40,3,0,3,1,0,1,1,1,1,1,1)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P40	Command Word
	3	Enable Lock rope tamper alert transmitting via GPRS and SMS channel
	0	Disable Swiping unauthorized RFID key alert transmitting
	3	Enable Unlocking alert transmitting via GPRS and SMS channel
	1	Enable Wrong password alert transmitting via GPRS channel
	0	Disable Vibration alert transmitting
	1	Enable Enter geo-fence alert transmitting via GPRS channel
	1	Enable Exit geo-fence alert transmitting via GPRS channel
	1	Enable Low battery alert transmitting via GPRS channel
1	Enable Back cover Opened alert transmitting via GPRS	

		channel
	1	Enable Motor Fault alert transmitting via GPRS channel.
	1	Enable Jamming alert transmitting via GPRS channel.
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P41 - Authorized RFID key Management

### P41 - Query Authorized RFID key

Command Description			
<p>This command is used to query Authorized RFID key.</p> <p>A total of 50 RFID keys are supported and they are stored in three separate groups. Up to 20 RFID keys per group</p>			
Syntax			
Read Command	(P41,<Action>,<Authorized RFID key group Index>)		
Response	(<Unit ID>,P41,<Authorized RFID key group Index>,<Total RFID keys in this group>,<Unlock RFID keys...>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting	0	
<Authorized RFID key group Index>	A total of 50 RFID keys are supported and they are stored in three separate groups. Up to 20 RFID keys per group	1~3	
<Total RFID keys in this group>	Up to 20 RFID keys per group	0~20	
<Unlock RFID keys...>	The range of RFID key card number is: 0000000001~4294967295, no more than 10 Numbers, otherwise the input is considered invalid.	0000000001~4294967295	
Example			
Query All Authorized RFID keys in group 2.			
Read Command	(P41,0,2)		
Response	(8043396604,P41,2,3,0013953759,0013953758,0013953757)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P41	Command Word	
	2	group 2	
	3	Total RFID keys in this group	
	0013953759,0013953758,0013953757	Unlock RFID keys	

Query All Authorized RFID keys in group 1 ,2 and 3													
Read Command	(P41,0,1) (P41,0,2) (P41,0,3)												
Response	<p><b>Note:</b> There is no newline in the actual received command content. The newline in the example is due to document layout.</p> <p>First Group (8043396604,P41,1,20,0000000021,0000000022,0000000023,0000000024,0000000025,0000000026,0000000027,0000000028,0000000029,0000000030,0000000031,0000000032,0000000033,0000000034,0000000035,0000000036,0000000037,0000000038,0000000039,0000000040)</p> <p>Second Group (8043396604,P41,2,20,0000000041,0000000042,0000000043,0000000044,0000000045,0000000046,0000000047,0000000048,0000000049,0000000050,0000000051,0000000052,0000000053,0000000054,0000000055,0000000056,0000000057,0000000058,0000000059,0000000060)</p> <p>Third Group (8043396604,P41,3,10,0000000061,0000000062,0000000063,0000000064,0000000065,0000000066,0000000067,0000000068,0000000069,0000000070)</p>												
Response Description	<table border="1"> <thead> <tr> <th>Content</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8043396604</td> <td>Unit ID</td> </tr> <tr> <td>P41</td> <td>Command Word</td> </tr> <tr> <td>1</td> <td>group 1</td> </tr> <tr> <td>20</td> <td>Total 20 RFID keys in this group</td> </tr> <tr> <td>0000000021,0000000022,0000000023...</td> <td>Unlock RFID keys</td> </tr> </tbody> </table>	Content	Description	8043396604	Unit ID	P41	Command Word	1	group 1	20	Total 20 RFID keys in this group	0000000021,0000000022,0000000023...	Unlock RFID keys
	Content	Description											
	8043396604	Unit ID											
	P41	Command Word											
	1	group 1											
	20	Total 20 RFID keys in this group											
0000000021,0000000022,0000000023...	Unlock RFID keys												
<b>Sending Command Channel</b>													
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB													

## P41 - Register(Add) Authorized RFID Key

<b>Command Description</b>			
This command is used to register Authorized RFID key. A total of 50 RFID keys are supported.			
<b>Syntax</b>			
Write Command	(P41,<Action>,<Add>,<Total of New added RFID keys>,< Unlock RFID keys...>)		
Response	(<Unit ID>,P41,<Add>,<Total RFID keys in Flash>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
<Action>	1 indicates Write the Parameters	1	
<Add>	Register Unlock RFID key. 1 indicates Add	1	

<Total of New added RFID keys>	The number of new RFID keys added this time. Add up to 20 RFID keys at a time	1~20	
<Unlock RFID keys...>	The range of RFID key card number is: 0000000001~4294967295, no more than 10 Numbers, otherwise the input is considered invalid.	0000000001~4294967295	
<Total RFID keys in Flash>	Total RFID keys remaining in Flash after added.	0~50	

### Example

Add RFID keys: 0013953759,0013953758,0013953757 as Unlock RFID key.

Write Command	(P41,1,1,3,0013953759,0013953758,0013953757)		
Response	(8043396604,P41,2,3,0013953759,0013953758,0013953757)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P41	Command Word	
	1	Add operation	
	3	Total 3 RFID keys remaining in Flash after added	

Add 50 RFID keys as Authorized RFID keys

Write Command	<p><b>Note:</b> When the instruction is actually sent, there should be no line breaks in the content of the instruction. The newline in the example is because of the need for document layout</p> <p>Add 20 RFID keys (P41,1,1,20,0000000021,0000000022,0000000023,0000000024,0000000025,0000000026,0000000027,0000000028,0000000029,0000000030,0000000031,0000000032,0000000033,0000000034,0000000035,0000000036,0000000037,0000000038,0000000039,0000000040)</p> <p>Add another 20 RFID keys (P41,1,1,20,0000000041,0000000042,0000000043,0000000044,0000000045,0000000046,0000000047,0000000048,0000000049,0000000050,0000000051,0000000052,0000000053,0000000054,0000000055,0000000056,0000000057,0000000058,0000000059,0000000060)</p> <p>Add last 10 RFID keys. Total supports 50 Unlock RFID keys (P41,1,1,10,0000000061,0000000062,0000000063,0000000064,0000000065,0000000066,0000000067,0000000068,0000000069,0000000070)</p>		
Response	<p>(8043396604,P41,1,20) // Add 20 RFID keys</p> <p>(8043396604,P41,1,40) // Add another 20 RFID keys</p> <p>(8043396604,P41,1,50) // Add last 10 RFID keys. Total supports 50 Unlock RFID keys</p>		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P41	Command Word	
	1	Add operation	

	40	Total 40 RFID keys remaining in Flash after added
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P41 - Delete Specified Authorized RFID key

Command Description			
This command is used to delete the specified Authorized RFID key.			
Syntax			
Write Command	(P41,<Action>,<Delete>,<Total number of RFID keys deleted>,< Unlock RFID keys...>)		
Response	(<Unit ID>,P41,<Delete>,<Total RFID keys in Flash>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	1 indicates Write the Parameters	1	
<Delete>	delete the specified Authorized RFID key. 2 indicates Delete	2	
<Total number of RFID keys deleted>	The total number of RFID keys deleted in this operation. Delete up to 20 RFID keys at a time	1~20	
<Unlock RFID keys...>	The range of RFID key card number is: 0000000001~4294967295, no more than 10 Numbers, otherwise the input is considered invalid.	0000000001~4294967295	
<Total RFID keys in Flash>	Total RFID keys remaining in Flash after deleted.	0~50	
Example			
Delete RFID keys: 0013953759,0013953758,0013953757			
Write Command	(P41,1,2,3,0013953759,0013953758,0013953757)		
Response	(8043396604,P41,2,47)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P41	Command Word	
	2	Delete operation	
	47	Total 47 RFID keys remaining in Flash after deleted	
Delete 10 Authorized RFID keys			
Write Command	<b>Note:</b> When the instruction is actually sent, there should be no line breaks in the content of the instruction. The newline in the example is because of the need for document layout Delete 10 Authorized RFID keys		

	(P41,1,2,10,0000000021,0000000062,0000000063,0000000064,0000000065,0000000066,0000000067,0000000068,0000000069,0000000070)	
Response	(8043396604,P41,2,23)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P41	Command Word
	2	Delete operation
	23	Total 23 RFID keys remaining in Flash after deleted
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P41 - Delete All Authorized RFID keys in Device

<b>Command Description</b>			
This command is used to delete the Authorized RFID keys stored in device at once.			
<b>Syntax</b>			
Write Command	(P41,<Action>,<Delete All>)		
Response	(<Unit ID>,P41,<Delete>,<Total RFID keys in Flash>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
<Action>	1 indicates Write the Parameters	1	
<Delete All>	delete all Authorized RFID keys. 3 indicates Delete All	3	
<Total RFID keys in Flash>	Total RFID keys remaining in Flash after deleted	0	
<b>Example</b>			
Delete All Authorized RFID keys			
Write Command	(P41,1,3)		
Response	(8043396604,P41,3,0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P41	Command Word	
	3	Delete All	
	0	Total 0 RFID keys remaining in Flash after deleted	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P42 - Batch-Add Unlocking Authorized RFID

Command Description			
This command is used to start batch-add unlocking authorized RFID.			
Syntax			
Write Command	(P42,<Start/End>)		
Response	(<Unit ID>,P42,< Start/End>)		
Parameter Description			
Parameters	Description	Value Range	Default
< Start/End >	0 end batch-add 1 Start batch-add	0~1	
Example			
start batch-add unlocking authorized RFID			
Write Command Start	(P42,1)		
Response	(8043396604,P42,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P42	Command Word	
	1	start batch-add	
Set Working mode to Real-time tracking mode(End batch-add)			
Write Command End	(P42,0)		
Response	(8043396604,P42,0)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P42	Command Word	
	0	end batch-add	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P43 - Unlock the device by Password

Command Description	
This command is used to unlock device by password.	
Default password is 888888	
Syntax	
Write Command	(P43,<Password>)
Response	(<Unit ID>,P43,<Successful/failed>,<Wrong password times>)

## Parameter Description

Parameters	Description	Value Range	Default
<Password>	The password to unlock this device. The password is fixed to a 6 arbitrary combination of characters.	6 characters	888888
<successful/failed>	1 indicates unlock successfully; 0 indicates failed	0~1	
<Wrong password times>	The number of times the unlock command was sent with the wrong password. More than 5 times, the device will trigger wrong password alert. This value is reset to 0 when the correct password is successfully entered.		

## Example

Unlock device by password

Write Command	(P43,888888)	
Response	(8043396604,P43,1,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P43	Command Word
	1	1 indicates unlock successfully; 0 indicates failed
0	The number of times the unlock command was sent with the wrong password is 0. This value is reset to 0 when the correct password is successfully entered.	

## Sending Command Channel

GPRS SMS USB

## P44 - Change the Unlock Password

Command Description			
This command is used to change the unlock password. Default password is 888888			
Syntax			
Write Command	(P44,<New Password>,<Old Password>)		
Response	(<Unit ID>,P44,<Successful/failed>)		
Parameter Description			
Parameters	Description	Value Range	Default
<New Password>	The new password to unlock this device. The password is fixed to a 6 arbitrary combination of characters.	6 characters	
<Old Password>	The new password to unlock this device. The password is fixed to a 6 arbitrary combination of characters.	6 characters	888888
<successful/failed>	1 indicates change password successfully; 0 indicates failed	0 0~1	
Example			
Change the unlock password			
Write Command	(P44,12#aAM,888888)		
Response	(8043396604,P44,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P44	Command Word	
	1	1 indicates change password successfully; 0 indicates failed	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P46 - Acknowledge Command to receive Lock or Unlock Report

### Command Description

This command is used to acknowledge the Lock and Unlock Report data at GPS platform.

**Note:** The device will keep on sending the same Lock and Unlock Report data if didn't receive this acknowledge command from GPS platform .

### Syntax

Write Command	(P46)
Response	(<Unit ID>,P46)

### Parameter Description

Parameters	Description	Value Range	Default
-	-		

### Example

GPS platform send below command to acknowledge the Lock and Unlock Report data from device side

Write Command	(P46)
Response	(8043396604,P46)

Response Description	Content	Description
	8043396604	Unit ID
	P46	Command Word

### Sending Command Channel

GPRS SMS USB

## P50 - Enable/Disable the Power Switch on Device Mainboard

### Command Description

This command is used to enable or disable the power switch on device mainboard.

After Disable power switch function, The device can't be shut down by this power switch.

### Syntax

Read Command	(P50,<Action>)
Response	(<Unit ID>,P50,<Enable/Disable Power Switch >)
Write Command	(P50,<Action>,<Enable/Disable Power Switch>)
Response	(<Unit ID>,P50,<Enable/Disable Power Switch >)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable Power Switch >	0 indicates Disable Power Switch function, The device can't be power off by this power switch.; 1 indicates Enable Power Switch function	0~1	1

### Example

Query Power Switch Status

Read Command	(P50,0)		
Response	(8043396604,P50,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P50	Command Word	
	1	Enable Power Switch function	

Disable Power Switch on device Mainboard

Write Command	(P50,1,0)		
Response	(8043396604,P50,0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P50	Command Word	
	0	Disable Power Switch function	

### Sending Command Channel

GPRS SMS USB

## P58 - Set/Query RFID unlocking related to geo-fence

Command Description			
This command is used to set/query RFID unlocking related to geo-fence (Default value is 1)			
Syntax			
Read Command	(P50,<Action>)		
Response	(<Unit ID>,P58,<Enable/Disable related to geo-fence >)		
Write Command	(P50,<Action>,<Enable/Disable related to geo-fence >)		
Response	(<Unit ID>,P58,<Enable/Disable related to geo-fence >)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable related to geo-fence >	0 Not related to geo-fence(the dviccan be unlocked by RFID any where); 1 Related to geo-fence(the dviccan be unlocked by RFID only as its in the go-fence)	0~1	1
Example			
Query Power Switch Status			
Read Command	(P58,0)		
Response	(8043396604,P58,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P58	Command Word	
	1	Related to geo-fence(the dviccan be unlocked by RFID only as its in the go-fence)	
Disable Related To Geo-fence			
Write Command	(P58,1,0)		
Response	(8043396604,P58,0)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P58	Command Word	
	0	Not related to geo-fence(the dviccan be unlocked by RFID any where)	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P97 - Set/Query Data Acknowledgement Mechanism

### Command Description

This command is used to change the data acknowledgement mechanism. By default, all alert data and lock/unlock report - (P45) require the GPS platform to acknowledge them, otherwise the data will continue to be sent. With this command, you can configure these data without platform confirmation, or configure the maximum number of reports when the platform does not respond correctly.

### Syntax

Read Command	(P97,<Action>)
Response	(<Unit ID>,P97,<Data type>,<Enable/Disable>,<Repeat times>)
Write Command	(P97,<Action>,<Data type>,<Enable/Disable>,<Repeat times>)
Response	(<Unit ID>,P97,<Data type>,<Enable/Disable>,<Repeat times>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Data type>	0 indicates Real time Position data 1 indicates Blind zone data 2 indicates Alert data Refer to Section <a href="#">7.1 Position and Alert data</a> No.5 3 indicates Lock and Unlock report-P45	0~3	
<Enable/Disable>	1 Indicates Enable acknowledgement mechanism. i.e. Set this data type require acknowledgement from GPS platform. 0 indicates Disable acknowledgement mechanism. i.e. Set this data type doesn't require acknowledgement from GPS platform. If this value is 0, the <Repeat times> parameter can be ignored	0~1	
<Repeat times>	0 means Repeat this report all the time if device do not receive the correct response command; 1~127 means Repeat Specified times, and then report the next data.	0~127	

### Example

Query Blind zone data's data acknowledgement mechanism setting

Read Command	(P97,0,1)	
Response	(8043396604,P97,1,0,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P97	Command Word
	1	Data type: Blind zone data
	0	Disable acknowledgement mechanism

		If this value is 0, the <Repeat times> parameter can be ignored
	0	Repeat times

Query Lock and Unlock data's data acknowledgement mechanism setting

Read Command	(P97,0,3)	
Response	(8043396604,P97,3,1,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P97	Command Word
	3	Data type: Lock and Unlock data
	1	Enable acknowledgement mechanism
	0	Repeat this report all the time if device do not receive the correct response command

Disable Alert data acknowledgement mechanism

Write Command	(P97,1,2,0,0)	
Response	(8043396604,P97,2,0,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P97	Command Word
	2	Data type: Alert data
	0	Disable acknowledgement mechanism. If this value is 0, the <Repeat times> parameter can be ignored
	0	Repeat times

**Sending Command Channel**

GPRS SMS USB

### Command Description

This command is used to upgrade the device firmware the air. Need to contact sales to confirm the correct IP address and port

### Syntax

Write Command (P99,<OTA server IP>,<OTA server port>)

Response (<Unit ID>,P99)

### Parameter Description

Parameters	Description	Value Range	Default
<OTA server IP>	Host Server IP that deploy OTA server software and specified firmware file		52.74.44.145
<OTA server port>	UDP port.		XXXX

### Example

Query Power Switch Status

Write Command (P99,52.74.44.145,1234)

Response (8043396604,P99)

Response Description	Content	Description
	8043396604	Unit ID
	P99	Command Word

### Sending Command Channel

GPRS SMS USB

## Command Description

This command is used to query device real-time status and GSM module version(2G/3G/4G)

## Syntax

Read Command (P100)

Response (<Unit ID>,P100,<status data...>)

## Parameter Description

Parameters	Description	Value Range	Default
/	/	/	/

## Example

Query device real-time status and GSM module version

Read Command (P100)

Response (8043396604,P100,SIM:1,CG:1,CSQ:22,MV:UC15EQAR03A10E1G,MS:7,IP:52.74.44.145,1234,Loc:1,Sat:11,Lock:1,Mil:10546,His:0,Rc:0,Volt:4082,90%,Chg:0,Tmp:37)

Response Description	Content	Description
	8043396604	Unit ID
	P100	Command Word
	SIM	Working SIM card slot: 1 mean's SIM Card slot 1 is working. The value is1 or 2
	CG	Network registration status 1: registered local network 2: unregistered, in search 3; registration rejected 4: unknown 5: registered roamed
	CSQ	Received signal strength indication
	MV	GSM module version: this is Quectel 3G module UC15EQAR03A10E1G
	MS	Mobile Status(Online mode) 0: The module is powered on for the first time 1: Module power off and restart 2: AT command initialization 3: Network check 4: Dialing 5: Network connection 6: Login 7: Online 8: Offline
	IP	Upload data to this IP/Port IP:52.74.44.145 Port:1234

Loc	location status: 1 mean's positioned,0 mean's not positioned
Sat	Number of satellites
Lock	Lock status: 1 mean's lock,0 mean's unlock
Mil	Currently mileage(unit is meter)
His	The number of remaining blind zone replenishment data stored by the current device
Rc	The number of remaining blind zone P45(lock/unlock data) stored by the current device
Volt	Current battery voltage (the unit is millivolts) and Percentage of electricity
Chg	Whether charging status 1 mean's charging,0 mean's no charging
Tmp	Current MCU temperature(the unit is Celsius)

**Sending Command Channel**

GPRS SMS USB

# P106 - Set/Query Can Unlock In The polygon Geo-fence

## Command Description

This command can query or set whether unlocked by swipe RFID card in the specified Geo-fence.

**The total number of T98E configurable polygon Geo-fence is 10 pcs. Please refer to commands P24,P29,P30,P31.**

## Syntax

Read Command	(P106,<Action>)
Response	(<Unit ID>,P106,<Geo-fence 1 Enable/Disable>,...<Geo-fence 10 Enable/Disable>)
Write Command	(P106,<Action>,<Geo-fence 1 Enable/Disable>,...<Geo-fence 10 Enable/Disable>)
Response	(<Unit ID>,P106, <Geo-fence 1 Enable/Disable>,...<Geo-fence 10 Enable/Disable>)

## Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<POI 1 Enable/Disable>,...<POI 100 Enable/Disable>	0 Disable 1 Enable	0~1	

## Example

Query can unlock in the specified Geo-fence

Read Command	(P106,0)	
Response	(8043396604,P106,1,0,0,0,1,0,0,0,0,1)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P106	Command Word
	1	<b>swipe RFID only unlock in Geo-fence 1</b>
	0	swipe RFID can't unlock in Geo-fence 2
	0	swipe RFID can't unlock in Geo-fence 3
	0	swipe RFID can't unlock in Geo-fence 4
	1	<b>swipe RFID only unlock in Geo-fence 5</b>
	0	swipe RFID can't unlock in Geo-fence 6
	0	swipe RFID can't unlock in Geo-fence 7
	0	swipe RFID can't unlock in Geo-fence 8
	0	swipe RFID can't unlock in Geo-fence 9
1	<b>swipe RFID only unlock in Geo-fence 10</b>	

Set can unlock in the specified Geo-fence

Write Command	(P106,1,1,1,1,1,1,1,1,1,1,1)	
Response	(8043396604,P106,1,1,1,1,1,1,1,1,1,1)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID

P106	Command Word
1	swipe RFID only unlock in Geo-fence 1
1	swipe RFID only unlock in Geo-fence 2
1	swipe RFID only unlock in Geo-fence 3
1	swipe RFID only unlock in Geo-fence 4
1	swipe RFID only unlock in Geo-fence 5
1	swipe RFID only unlock in Geo-fence 6
1	swipe RFID only unlock in Geo-fence 7
1	swipe RFID only unlock in Geo-fence 8
1	swipe RFID only unlock in Geo-fence 9
1	swipe RFID only unlock in Geo-fence 10

**Sending Command Channel**

GPRS SMS USB





## P110 - Set/Query G-Sensor filter function

### Command Description

This command is used to query/enable/disable G-sensor's filter function.

This function is using for mileage calculate.

### Syntax

Read Command	(P110,<Action>)
Response	(<Unit ID>,P110,<Vibration Level>,<Vibration Keep Time>,<Rest Keep Time>,<Enable/Disable>)
Write Command	(P110,<Action>,<Vibration Level>,<Vibration Keep Time>,<Rest Keep Time>,<Enable/Disable>)
Response	(<Unit ID>,P110,<Vibration Level>,<Vibration Keep Time>,<Rest Keep time>,<Enable/Disable>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Vibration Level>	unit is mg	60~120	80
<Vibration Keep Time>	unit is seconds	1~255	5
<Rest Keep time>	unit is seconds	1~255	30
<Enable/Disable>	1 Indicates Enable 0 indicates Disable	0~1	0

### Example

Query G-Sensor filter function's parameter

Read Command	(P110,0)	
Response	(8043396604,P110,80,5,30,0)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P110	Command Word
	80	Vibration Level is 80mg
	5	Vibration Keep Time is 5 seconds
	30	Rest Keep time is 30 seconds
0	Disable this function	

Enable G-Sensor filter function

Write Command	(P110,1,80,5,30,1)	
Response	(8043396604,P110,80,5,30,1)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P110	Command Word
	80	Vibration Level is 80mg
5	Vibration Keep Time is 5 seconds	

	30	Rest Keep time is 30 seconds
	1	Enable this function
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

# P111 - Set/Query Working In Lock/Unlock Mode Reporting Data Time Interval

## Command Description

This command is used to set /query working in Lock/Unlock mode reporting data time interval.

When the lock rope is connected (**locked state**). Do not sleep, can configure the report interval in the vibration state and the report interval in the static state. For example, it is reported every 30 seconds when it moves and every 60 seconds when it stops.

When the lock rope is disconnected (**unlocked state**), no longer refer to the vibration state, a fixed wake-up value can be configured, wake-up work for 10 minutes, timing wake up interval range 30 ~ 1440 minutes. Refer to command [P04](#)

## Syntax

Read Command	(P111,<Action>)
Response	(<Unit ID>,P111, <Shake Reporting Data Time Interval>,<Static Reporting Data Time Interval>)
Write Command	(P111,<Action>,<Shake Reporting Data Time Interval>,<Static Reporting Data Time Interval>)
Response	(<Unit ID>,P111, <Shake Reporting Data Time Interval>,<Static Reporting Data Time Interval>)

## Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Shake Reporting Data Time Interval>	unit in seconds	1~65535	30
<Static Reporting Data Time Interval>	unit in seconds	1~65535	60

## Example

query working in Lock/Unlock mode reporting data time interval.

Read Command	(P111,0)	
Response	(8043396604,P111,30,60)	
Response Description	<b>Content</b>	<b>Description</b>
	8043396604	Unit ID
	P111	Command Word
	30	Shake Reporting Data Time Interval is 30 sec
	60	Static Reporting Data Time Interval is 60 sec

set working in Lock/Unlock mode reporting data time interval.

Write Command	(P111,1,60,120)
Response	(8043396604,P111,60,120)

Response Description	Content	Description
	8043396604	Unit ID
	P111	Command Word
	60	Shake Reporting Data Time Interval is 60 sec
	120	Static Reporting Data Time Interval is 120 sec

**Sending Command Channel**

GPRS SMS USB

## P112 - Enable/Disable Lock Rope Cut Reminder(Blink & Beep)

Command Description			
This command is used to enable or disable the lock rope cut reminder (Blink & Beep)			
Syntax			
Read Command	(P112,<Action>)		
Response	(<Unit ID>,P112,<Enable/Disable reminder>)		
Write Command	(P112,<Action>,<Enable/Disable reminder>)		
Response	(<Unit ID>,P112,<Enable/Disable reminder>)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable reminder >	0 indicates Disable reminder function 1 indicates Enable reminder function	0~1	0
Example			
Query lock rope cut reminder status			
Read Command	(P112,0)		
Response	(8043396604,P112,0)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P112	Command Word	
	0	Disable lock rope cut reminder function	
Enable lock rope cut reminder function			
Write Command	(P112,1,1)		
Response	(8043396604,P112,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P112	Command Word	

	1	Enable lock rope cut reminder function
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P113 - Enable/Disable Blind Area Data Packaging

<b>Command Description</b>			
This command is used to enable or disable the blind area data packaging function.			
<b>Syntax</b>			
Read Command	(P113,<Action>)		
Response	(<Unit ID>,P113,<Enable/Disable Packaging Function>)		
Write Command	(P113,<Action>,<Enable/Disable Packaging Function >)		
Response	(<Unit ID>,P113,<Enable/Disable Packaging Function >)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable reminder >	0 indicates Disable packaging function 1 indicates Enable packaging function	0~1	0
<b>Example</b>			
Query blind area data packaging function status			
Read Command	(P113,0)		
Response	(8043396604,P113,0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P113	Command Word	
	0	Disable blind area data packaging function	
Enable blind area data packaging function			
Write Command	(P113,1,1)		
Response	(8043396604,P113,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P113	Command Word	
	1	Enable blind area data packaging function	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

### Command Description

This command is used to enable or disable base station positioning function

**This function uses the Quectel server's base station positioning function, some countries and regions do not support! which may cause the device to be unstable the TCP link.**

**Please use it with caution!!!! This function is disable by default!!!!**

### Syntax

Read Command	(P114,<Action>)
Response	(<Unit ID>,P114,<Enable/Disable base station positioning function>)
Write Command	(P114,<Action>,<Enable/Disable base station positioning function>)
Response	(<Unit ID>,P114,<Enable/Disable base station positioning function>)

### Parameter Description

Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable base station positioning function>	0 indicates Disable base station positioning function 1 indicates Enable base station positioning function	0~1	0

### Example

Query blind area data packaging function status

Read Command	(P114,0)		
Response	(8043396604,P114,0)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P114	Command Word	
	0	Disable base station positioning function	

Enable blind area data packaging function

Write Command	(P114,1,1)		
Response	(8043396604,P114,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P114	Command Word	
	1	Enable base station positioning function	

### Sending Command Channel

GPRS SMS USB

## P122 - Enable/Disable Bluetooth Function

Command Description			
This command is used to enable or disable the Bluetooth function.			
Syntax			
Read Command	(P122,<Action>)		
Response	(<Unit ID>,P122,<Enable/Disable Bluetooth Function>)		
Write Command	(P122,<Action>,<Enable/Disable Bluetooth Function >)		
Response	(<Unit ID>,P122,<Enable/Disable Bluetooth Function >)		
Parameter Description			
Parameters	Description	Value Range	Default
<Action>	0 Query the previous setting 1 Write the Parameters	0~1	
<Enable/Disable reminder >	0 indicates Disable Bluetooth function 1 indicates Enable Bluetooth function	0~1	0
Example			
Query blind area data packaging function status			
Read Command	(P122,0)		
Response	(8043396604,P122,0)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P122	Command Word	
	0	Disable Bluetooth function	
Enable blind area data packaging function			
Write Command	(P122,1,1)		
Response	(8043396604,P122,1)		
Response Description	Content	Description	
	8043396604	Unit ID	
	P122	Command Word	
	1	Enable Bluetooth function	
Sending Command Channel			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P123 - Change the Bluetooth Encryption Key

Command Description
This command is used to change the Bluetooth communication encryption key of the algorithm.

Default key is imei's last ten number			
<b>Syntax</b>			
Write Command	(P123,< encryption key>)		
Response	(<Unit ID>,P123,<Successful/failed>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
< encryption key>	The encryption key of the algorithm	6 characters	
<successful/failed>	1 indicates change encryption key successfully 0 indicates change encryption key failed	0~1	
<b>Example</b>			
Change he Bluetooth communication secret key of the algorithm			
Write Command	(P123,12345678)		
Response	(8043396604,P123,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P123	Command Word	
	1	1 indicates change encryption key successfully 0 indicates change encryption key failed	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

## P125 – Extract Data From Micro USB/Bluetooth (need firmare version ‘T98EE\_.....’)

<b>Command Description</b>			
This command is used to extract data from micro usb or bluetooth.			
<b>Firmware version must be in ‘T98EE_ .....’ can support this function.</b>			
<b>Syntax</b>			
Command	Read All Data: (P125,<Data Type>,<To USB/BT>,<Action>) Time Period Read: (P125,<Data Type>,<To USB/BT>,<Action>,<Begin Time>,<End Time>)		
Response	<b>Return different data according to the combination of write command parameters:</b> (<Unit ID>,P125,<Data Type>,<Count>) (<Unit ID>,P125,<Data Type>,<Comma-separated data>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
< Data Type >	0 Position Data 1 Alert Data 2 Lock and Unlock Report	0 ~ 2	

< To USB/BT >	0 Micro USB (TTL) 1 Bluetooth	0 ~ 1	
< Action >	0 Read Summary 1 Read Data	0 ~ 1	
<Begin Time >	Format is Day Month Year Hour Minute Second: DDMMYYHHNNSS e.g. 301019000000 = 2019-10-30 00:00:00		
< End Time >	Format is Day Month Year Hour Minute Second: DDMMYYHHNNSS e.g. 301019235959 = 2019-10-30 23:59:59		
< Count >	Maximum Number of storages: 0 Position Data: 28000 PCS 1 Alert Data: 2800 PCS 2 Lock and Unlock Report: 2400 PCS		
<Comma-separated data>	<p><b>Position Data:</b>  <b>(8033613486,P125,1,17,111019130526,22707700,114264830,15,1,80,20189,8,0,8192,85,4362,9369,22,0,0,460,0,163)</b></p> <p>&lt;Protocol Version&gt; <b>1</b></p> <p>&lt;Data Type&gt; <b>17</b> (DEC) Position Data</p> <p>&lt;Datetime&gt; <b>111019130526</b> DDNNYYHHNNSS</p> <p>&lt;Latitude&gt; <b>22707700</b> DD.DDDDDD <b>22707700/1000000 = 22.707700</b></p> <p>&lt;Longitude&gt; <b>114264830</b> DDD.DDDDDD <b>114264830/1000000 = 114.264830</b></p> <p>&lt;Latitude/Longitude Direction&gt; <b>15</b> (DEC) 15 -&gt; 0xF -&gt; 1111</p> <p>&lt;Speed&gt; <b>1</b> (Unit is KM/H)</p> <p>&lt;Direction&gt; <b>80</b> (0~360)</p> <p>&lt;Mileage&gt; <b>20189</b> (Unit is KM)</p> <p>&lt;SAT Count&gt; <b>8</b> Number of satellites (DEC)</p> <p>&lt; Binding ID&gt; <b>0</b> (DEC)</p> <p>&lt;Status&gt; <b>8192</b> (DEC) 8192-&gt;0x2000</p> <p>&lt;Battery&gt; <b>85</b> (85%) (DEC)</p> <p>&lt;Cell ID&gt; <b>4362</b> (DEC)</p> <p>&lt;LAC&gt; <b>9369</b> (DEC)</p> <p>&lt;CSQ&gt; <b>22</b> Received Signal Strength Indication</p> <p>&lt;Geo-ID&gt; <b>0</b> (DEC)</p> <p>&lt;Cell ID High&gt;<b>0</b> (DEC)</p> <p>&lt;MCC&gt; <b>460</b> (DEC)</p> <p>&lt;MNC&gt; <b>0</b> (DEC)</p> <p>&lt;SN&gt; <b>163</b> serial number (DEC)</p> <p><b>Alert Data:</b>  <b>(8033613486,P125,1,18,111019071350,22707036,114264748,15,65,0,20199,8,0,8448,85,4511,9368,17,0,0,460,0,225)</b></p> <p>&lt;Protocol Version&gt; <b>1</b></p>		

	<Data Type> <b>18</b> (DEC) Alert Data <Datetime> <b>111019071350</b> DDNNYYHHNNSS <Latitude> <b>22707036</b> DD.DDDDDD 22707036/1000000 = 22.707036 <Longitude> <b>114264748</b> DDD.DDDDDD 114264748/1000000 = 114.264748 <Latitude/Longitude Direction> <b>15</b> (DEC) 15 -> 0xF -> 1111 <Speed> <b>65</b> (Unit is KM/H) <Direction> <b>0</b> (0~360) <Mileage> <b>20199</b> (Unit is KM) <SAT Count> <b>8</b> Number of satellites (DEC) < Binding ID> <b>0</b> (DEC) <Status> <b>8448</b> (DEC) 8448->0x2100 <Battery> <b>85</b> (85%) (DEC) <Cell ID> <b>4511</b> (DEC) <LAC> <b>9368</b> (DEC) <CSQ> <b>17</b> Received Signal Strength Indication <Geo-ID> <b>0</b> (DEC) <Cell ID High> <b>0</b> (DEC) <MCC> <b>460</b> (DEC) <MNC> <b>0</b> (DEC) <SN> <b>255</b> serial number (DEC)  <b>Lock And Unlock Report Data:</b> (8033613486,P45,121019,022530,22.706768,N,114.265245,E,A,0,0,4,1,0000000000,1,0,0)		
--	---	--	--

### Example 1

#### Read Summary (Position Data)

Command	(P125,0,0,0)	
Response	(8033613486,P125,0,1889)	
Response Description	<b>Content</b>	<b>Description</b>
	8033613486	Unit ID
	P125	Command Word
	0	Position Data Type
	1889	count

### Example 2

#### Read Summary (Alert Data)

Command	(P125,1,0,0)	
Response	(8033613486,P125,1,13)	
Response Description	<b>Content</b>	<b>Description</b>
	8033613486	Unit ID
	P125	Command Word
	1	Alert Data Type
	13	count

Example 3		
<b>Read Summary (Lock and Unlock Report Data)</b>		
Command	(P125,2,0,0)	
Response	(8033613486,P125,2,1)	
Response	<b>Content</b>	<b>Description</b>
Description	8033613486	Unit ID
	P125	Command Word
	2	Alert Data Type
	1	count
Example 4		
<b>Read All Data (Position Data)</b>		
Command	(P125,0,0,1)	
Response	(8033613486,P125,0,1951)  (8033613486,P125,1,17,311200000030,0,0,14,0,0,0,0,0,8192,5,0,0,20,0,0,0,0,1)  (8033613486,P125,1,17,311200000100,22709528,114265182,14,0,0,0,0,0,8193,5,4512,9368,20,0,0,460,0,2)  (8033613486,P125,1,17,311200000130,22709528,114265182,14,0,0,0,0,0,8193,5,4512,9368,20,0,0,460,0,3)  ...	
Example 5		
<b>Read All Data (Alert Data)</b>		
Command	(P125,1,0,1)	
Response	(8033613486,P125,1,14)  (8033613486,P125,1,18,111019071350,22707036,114264748,15,0,0,0,8,0,8448,85,4511,9368,17,0,0,460,0,225)  (8033613486,P125,1,18,111019051350,22706915,114264883,15,0,0,0,7,0,8448,85,4511,9368,17,0,0,460,0,240)  ...	
Example 6		
<b>Read All Data (Lock and Unlock Report Data)</b>		
Command	(P125,2,0,1)	
Response	(8033613486,P125,2,1)  (8033613486,P45,121019,022530,22.706768,N,114.265245,E,A,0,0,4,1,0000000000,1,0,0)	
Example 7		
<b>Time Period Read Data (Position Data)</b>		
Command	(P125,0,0,2,121019000000,121019105959)	
Response	(8033613486,P125,0,121019000000,121019105959)  (8033613486,P125,1,17,121019010532,22703859,114256226,14,0,0,0,0,0,8193,20,4362,9369,22,0,0,460,0,10)  (8033613486,P125,1,17,121019010602,22703859,114256226,14,0,0,0,3,0,8193,20,4362,9369,21,0,0,460,0,11)  (8033613486,P125,1,17,121019010632,22703859,114256226,14,0,0,0,0,0,8193,20,4362,9369,20,0,0,460,0,12)  ...	
Example 8		
<b>Time Period Read Data (Alert Data)</b>		
Command	(P125,1,0,2,121019070000,121019105959)	
Response	(8033613486,P125,1,121019070000,121019105959)	

	(8033613486,P125,1,18,121019071949,22707533,114264901,15,0,0,0,8,0,8448,15,4053.9369,18,0,0,460,0,242)	
	(8033613486,P125,1,18,121019075622,22706748,114263564,14,0,0,0,0,0,10240,20,0,0,0,0,0,0,0)	
	(8033613486,P125,1,18,121019093001,22707261,114264810,14,0,0,0,0,0,10240,10,0,0,0,0,0,0,0)	
<b>Example 9</b>		
<b>Time Period Read Data (Lock and Unlock Report Data)</b>		
Command	(P125,2,0,2,121019000000,121019035959)	
Response	(8033613486,P125,2,121019000000,121019035959) (8033613486,P45,121019,022530,22.706768,N,114.265245,E,A,0,0,4,1,0000000000,1,0,0)	
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> USB <input checked="" type="checkbox"/> Bluetooth		

## P126 - Clear blind spot data

<b>Command Description</b>			
This command is used to clear blind spot data. <b>When modifying IP, port, APN, ID information, the blind area will be cleared.</b>			
<b>Syntax</b>			
Write Command	(P126)		
Response	(<Unit ID>,P126,<Successful/failed>)		
<b>Parameter Description</b>			
Parameters	Description	Value Range	Default
<successful/failed>	1 successfully 0 failed	0~1	
<b>Example</b>			
Change the Bluetooth communication secret key of the algorithm			
Write Command	(P126,1)		
Response	(8043396604,P126,1)		
Response Description	<b>Content</b>	<b>Description</b>	
	8043396604	Unit ID	
	P126	Command Word	
	1	1 successfully 0 failed	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			

# P127 - Extended power saving solution: turn off GPS module in idle time

**Command Description**  
This command is used to turn off the GPS module in idle time to save power.

**Syntax**

Command	(P127,<Action>,< turn off GPS module time >) (P127,1,10)
Response	(<Unit ID>,P127,<turn off GPS module time>)

**Parameter Description**

Parameters	Description	Value Range	Default
< Action >	0 Read 1 Set	0 ~ 1	
<turn off GPS module time>	10: If the upload interval is 30 seconds, after uploading the data, turn off the GPS 10 seconds. If the upload interval is 0 seconds, mean's disable this function.	0~590	0

**Example 1**  
Enable the GPS off function, the GPS off time is 10 seconds, if the upload interval is 30 seconds, after uploading the data, turn off the GPS 10 seconds.

Command	(P127,1,10)		
Response	(8033613486,P127,10)		
Response	<b>Content</b>	<b>Description</b>	
Description	8033613486	Unit ID	
	P127	Command Word	
	10	Turn off GPS module time is 10 seconds	

**Example 2**  
Disable the GPS off function

Command	(P127,1,0)		
Response	(8033613486,P127,0)		
Response	<b>Content</b>	<b>Description</b>	
Description	8033613486	Unit ID	
	P127	Command Word	
	0	Disable this function	

**Example 3**  
Query the GPS off function

Command	(P127) or (P127,0)		
Response	(8033613486,P127,10)		
Response	<b>Content</b>	<b>Description</b>	

Description	8033613486	Unit ID
	P127	Command Word
	10	Turn off GPS module time is 10 seconds
<b>Sending Command Channel</b>		
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB		

## P128 – Query Bluetooth Mac Address & Name & Version

<b>Command Description</b>			
This command is used to query Bluetooth mac address & name & version. If the return is empty, it means that there is no Bluetooth module in the lock.			
<b>Syntax</b>			
Write Command	(P128)		
Response	(<Unit ID>,P128,<Bluetooth mac address>,<Bluetooth name>,<Bluetooth version>)		
<b>Parameter Description</b>			
<b>Parameters</b>	<b>Description</b>	<b>Value Range</b>	<b>Default</b>
<b>Example</b>			
Query Bluetooth Mac Address & Name & Version			
Command	(P128)		
Response	(6020110481,P128,3CA5197B16C2,T98E_6020110481,JDY-16-V2.3)		
Response Description	<b>Content</b>	<b>Description</b>	
	6020110481	Unit ID	
	P128	Command Word	
	3CA5197B16C2	Bluetooth mac address	
	T98E_6020110481	Bluetooth name	
	JDY-16-V2.3	Bluetooth version	
<b>Sending Command Channel</b>			
<input checked="" type="checkbox"/> GPRS <input checked="" type="checkbox"/> SMS <input checked="" type="checkbox"/> USB			